


Overview


HPE ProLiant DL360 Generation9 (Gen9)

Hewlett Packard Enterprise's leading server for dense general-purpose computing, the HPE ProLiant DL360 Gen9 Server delivers increased performance with the best memory and I/O expandability packed in a 1U dense rack design. Reliability, serviceability and always on availability, backed by a comprehensive warranty, make it ideal for the most space constrained server workloads.

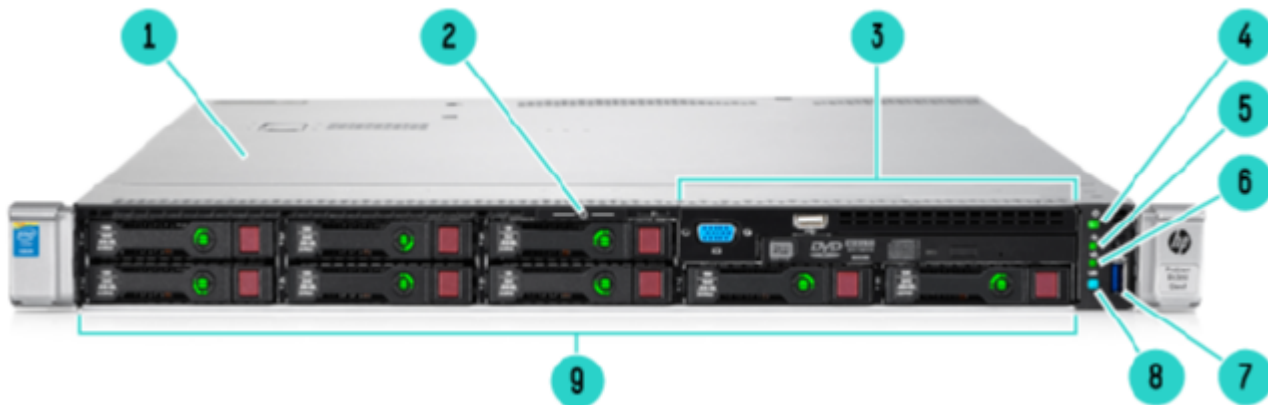

Front View


- | | |
|--|---|
| 1. Access Panel | 6. NIC Status LED |
| 2. Serial Label Pull Tab | 7. USB 3.0 Connector |
| 3. HPE Universal Media Bay or NVMe | 8. Unit Identification Button & LED |
| NOTE: Shown w/VGA, USB 2.0 and DVD-ROM or DVD-RW option. Alternative options 2 SFF HDDs or VGA and USB 2.0. | 9. SAS/SATA/SSD/NVMe Drive Bays |
| 4. Power On/Standby button and system power LED button | NOTE: 8SFF Model shown. 8SFF can also be configured as 4 SAS/SATA (Drives 1-4) + 4 NVMe (Drives 5-8). 4LFF and 8 + 2SFF Models are also available. |
| 5. Health LED | |

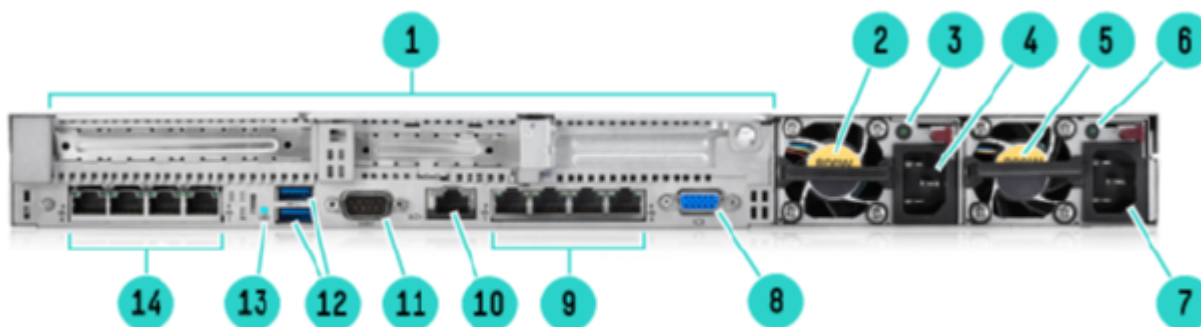

Rear view

Overview

1. PCIe 3.0 Slots 1-3
NOTE: Slot 1 and 2 Riser Ships Standard, Slot 3 Optional 1 FH / $\frac{3}{4}$ length and two Low Profile slots available (shown) or two FH/ $\frac{3}{4}$ length slots.
2. HPE Flexible Slot Power Supply Bay 2
3. Power Supply 2 Status LED
4. Power Supply 2 C13 Connection
5. HPE Flexible Slot Power Supply Bay 1
6. Power Supply 1 Status LED
7. Power Supply 1 C13 Connection
8. Video Connector
9. Embedded 4x1GbE Network Adapter
10. Dedicated iLO 4 connector
11. Serial Port Connector (Optional)
12. USB 3.0 Connectors (2)
13. Unit Identification LED
14. FlexibleLOM bay (Optional)
NOTE: Shown: 4x1GbE.

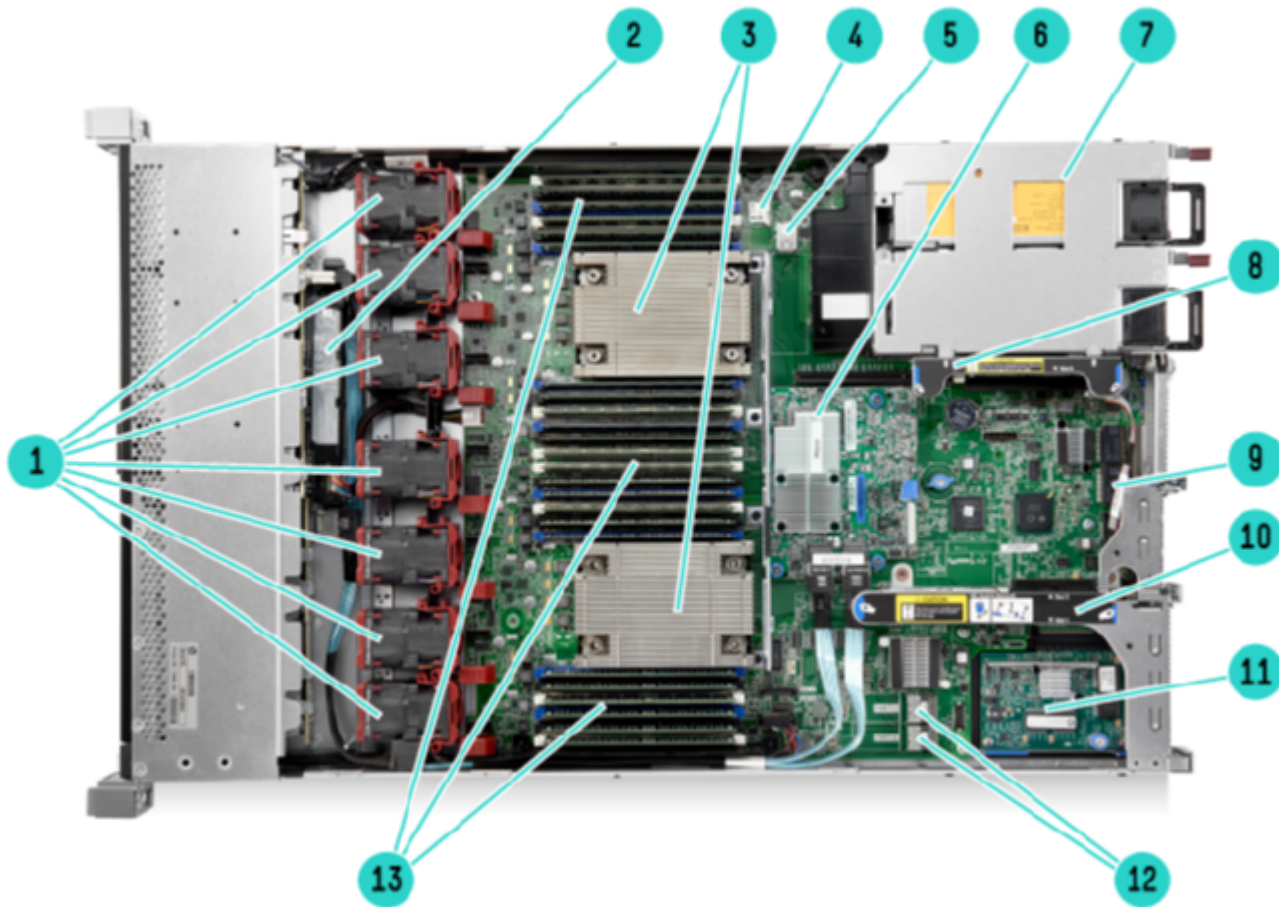

Internal View

Overview

1. 5 Standard Fans Ship for 1P and 7 Standard Fans Ship for 2P
NOTE: High Performance Fans also available as an option.
2. HPE Smart Storage Battery (Optional)
3. 2 Processors with HPE Smart Socket Guide
4. MicroSD card slot
NOTE: Optional Dual Micro-SD option.
5. Dual Internal USB 3.0 connector
6. HPE Flexible Smart Array or Smart HBA (Optional)
NOTE: H240ar shown and P440ar available.
7. 2 HPE Flexible Slot Power supplies
NOTE: Optional Micro UPS option.
8. Secondary PCIe 3.0 riser for PCIe slot 3 (requires CPU 2)
9. Embedded 4x1Gbe NIC
10. Primary PCIe 3.0 riser for PCIe slots 1 & 2
11. FlexibleLOM Bay (Optional)
12. Embedded SATA Controller ports
13. 24 DDR4 DIMM slots (12 per processor)

What's New

- New HDD offering.

Standard Features

NOTE: For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

Processor	Model	CPU frequency	Cores	L3 Cache	Power	QPI	DDR4 Hz
	E5-2699v3	2.3GHz	18	45MB	145W	9.6GT/s	2133
	E5-2698v3	2.3GHz	16	40MB	135W	9.6GT/s	2133
	E5-2697v3	2.6GHz	14	35MB	145W	9.6GT/s	2133
	E5-2695v3	2.3GHz	14	35MB	120W	9.6GT/s	2133
	E5-2690v3	2.6GHz	12	30MB	135W	9.6GT/s	2133
	E5-2687Wv3	3.1GHz	10	25MB	160W	9.6GT/s	2133
	E5-2683v3	2.0GHz	14	35MB	120W	9.6GT/s	2133
	E5-2680v3	2.5GHz	12	30MB	120W	9.6GT/s	2133
	E5-2670v3	2.3GHz	12	30MB	120W	9.6GT/s	2133
	E5-2667v3	3.2GHz	8	20MB	135W	9.6GT/s	2133
	E5-2660v3	2.6GHz	10	25MB	105W	9.6GT/s	2133
	E5-2650v3	2.3GHz	10	25MB	105W	9.6GT/s	2133
	E5-2650Lv3	1.8GHz	12	30MB	65W	9.6GT/s	2133
	E5-2643v3	3.4GHz	6	20MB	135W	9.6GT/s	2133
	E5-2640v3	2.6GHz	8	20MB	90W	8.0GT/s	1866
	E5-2637v3	3.5GHz	4	15MB	135W	9.6GT/s	2133
	E5-2630v3	2.4Ghz	8	20MB	85W	8.0GT/s	1866
	E5-2630Lv3	1.8GHz	8	20MB	55W	8.0GT/s	1866
	E5-2623v3	3.0GHz	4	10MB	105W	8.0GT/s	1866
	E5-2620v3	2.4GHz	6	15MB	85W	8.0GT/s	1866
	E5-2609v3	1.9GHz	6	15MB	85W	6.4GT/s	1600
	E5-2603v3	1.6GHz	6	15MB	85W	6.4GT/s	1600

Chipset Intel® C610 Series Chipset
Intel® E5-2600v3 Processor Family
NOTE: For more information regarding Intel® chipsets, please see the following URL:
<http://www.intel.com/products/server/chipsets/>

On System Management Chipset HPE iLO (Firmware HPE iLO4 2.3) 4GB NAND
NOTE: 1GB USB user space configurable via UEFI and accessible via iLO. Read and learn more in the [iLO QuickSpecs](#).

Standard Features

Memory One of the following depending on model	Type:	HPE SmartMemory	
		DDR4 Registered (RDIMM) or Load Reduced (LRDIMM)	
	DIMM Slots Available	24	(12 DIMM slots per processor, 4 channels per processor, 3 DIMMs per channel)
	Maximum Capacity (LRDIMM)	1.5TB	(24 x 64GB LRDIMM @2133MHz)
	Maximum Capacity (RDIMM)	768GB	(24 x 32GB LRDIMM @2133MHz)

Memory Protection	Advanced ECC	Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.
	Online spare	Memory online spare mode detects a rank that is degrading and switches operation to the spare rank.

Expansion Slots

Primary Riser	Expansion Technology		Bus Width	Connector Width	Bus Number	Form Factor		Notes
	Slots #							
	1	PCIe 3.0	x16	x16		Full-height, ¾ length (up to 9.5") Slot		Processor 1
	2	PCIe 3.0	x8	x8		Low profile slot		Processor 1
NOTE: Bus Width indicates the number of physical electrical lanes running to the connector.								
Secondary Riser	Expansion Technology		Bus Width	Connector Width	Bus Number	Device Number	Form Factor	Notes
	Slots #							
	3	PCIe 3.0	x16	x16			Low profile	Processor 2
	3	PCIe 3.0	x16	x16			Full-height, ¾ length (up to 9.5") Slot	Processor 2*
*PCI-E Slot 2 cannot be used in conjunction with the FH/¾ Length option kit (744644-B21)								

Storage Controller One of the following depending on model	Entry Models	HPE Dynamic Smart Array B140i Controller
	Base Models	HPE H240ar Smart Host Bus Adapter
	Performance Models	HPE Flexible Smart Array P440ar/2GB

Standard Features

Internal Storage Devices	Optical Drives	8 SFF with optional Universal Media bay NOTE: Option Kit 764632-B21 VGA, USB 2.0, and DVD-RW kit.
One of the following depending on model		4 LFF NOTE: Two option kits available for optical drive: 726536-B21 or 726537-B21; Optical cable kit required for optical drives: 766203-B21.
	Hard Drives	None ship standard
	Hard Drive Bays	8 SFF with optional Universal Media bay or NVMe drive support 8SFF (4 SAS/SATA + 4 NVMe) 4 LFF 10 SFF; 8 SFF Model with optional 2 SFF SAS/SATA kit: 764630-B21 NOTE: HPE ProLiant DL360 Series servers offer both SFF and LFF versions in CTO. NOTE: All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either P/N 666987-B21: HPE SFF Hard Drive Blank Kit or P/N 666986-B21: HPE LFF Hard Drive Blank Kit. These part numbers for single HDD blanks below are also provided should the customer require replacement HDD blanks for their server. NOTE: The 2SFF kit comes with the cable needed to attach the 2 drives to the internal B140i SATA controller. For SAS an alternate storage controller and it associated cable kit are required.

Maximum Internal Storage		CAPACITY	CONFIGURATION
Hot Plug SFF SAS SSD		19.2TB	10x1.92TB
Hot Plug SFF SATA SSD		38.4TB	10x3.84TB
Hot Plug LFF SATA SSD		3.84TB	4x960GB
Hot Plug LFF SAS SSD		6.4TB	4x1.6TB
Hot Plug SFF SAS		20.0TB	10x2.0TB
Hot Plug SFF SATA		20.0TB	10x2.0TB
Hot Plug LFF SAS		32.0TB	4x8TB
Hot Plug LFF SATA		32.0TB	4x8TB
Hot Plug SFF NVMe SSD	3.2TB NVMe + 16TB SFF		2x1.6TB NVMe + 8x2TB SFF

Standard Features

Power Supply
One of the
following
depending on
model

HPE 500W Flex Slot Platinum Hot Plug Power Supply
NOTE: Available in 94% efficiency.
HPE 800W Flex Slot Platinum Hot Plug Power Supply
NOTE: Available in 94% and 96% efficiency.
NOTE: Also available in -48VDC and 227VAC/380VDC power inputs.
HPE 1400W Flex Slot Platinum Plus Hot Plug Power Supply
NOTE: Available in 94% efficiency.
HPE Flexible Slot Battery Backup Unit Kits
NOTE: Flex Slot Battery Backup provides 750W output and 500W in paralleled configuration.

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen9 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the HPE Power Advisor Tool located at <http://www.hp.com/go/hppoweradvisor>.

Power specifications and technical content for all HPE Server power supplies can be found at <http://www.hp.com/go/proliant/powersupply>.

System Fans One of the following depending on model		Non-redundant	Redundant
	1P model	N/A	5 fans
		Non-redundant	Redundant
	2P model	N/A	7 fans
	NOTE: The second processor option kit contains two fans.		
	NOTE: High Performance Fan Kit, 766201-B21, is available to meet some extended ambient operating temperatures above 35° C. Qualifications for extended ambient configurations are detailed at: https://www.hp.com/servers/ashrae .		

Standard Features

Interfaces	Serial	1
	NOTE: Optional kit: 764646-B21.	
	Video	1 rear (Standard) 1 front (Optional)
	NOTE: Front VGA options available for 8SFF and 4LFF models as detailed in the core options section of this QuickSpecs.	
	Network RJ-45 (Ethernet)	Both the SFF and LFF Chassis have an embedded 4x1GB NIC and a FlexibleLOM bay. (See HPE Networking section below for more details and options).
	HPE iLO Remote Management Network Port	1Gb Dedicated
	SD Connector	1 micro SD Internal
	NOTE: The SD slot is not a hot-pluggable device. Customers should not attempt to plug an SD card into the SD slot while the server is powered.	
	USB 3.0	5 total: 2 rear, 1 front, 2 internal

Operating Systems and Virtualization Software Support for ProLiant Servers	<u>Microsoft Windows Server</u>	
	<u>Canonical Ubuntu</u>	
	<u>Red Hat Enterprise Linux (RHEL)</u>	
	<u>SUSE Linux Enterprise Server (SLES)</u>	
	<u>Oracle Solaris</u>	
	<u>VMware</u>	
	<u>Citrix XenServer</u>	
	NOTE: For more information on Hewlett Packard Enterprise's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server including how to purchase from HPE, please visit our OS Support Site at: http://www.hp.com/go/ossupport and our driver download page.	

Upgradeability	Upgradeable to two processors (36 Cores)	
	Up to 24 DIMM slots available for higher Memory capacity	
	Up to 10 SFF Hard Drive Bays; or 4 LFF Hard Drive Bays	
	FlexibleLOM slot for 1Gigabit or 10 Gigabit Ethernet or QDR/FDR InfiniBand networking options	
	3 PCIe 3.0 I/O slots for additional communications and storage expansion	
	NOTE: Slot 1 and 2 Riser Shipped Standard, Slot 3 Optional 1 FH / ¾ length and two Low Profile slots available (shown) or two FH/ ¾ length slots.	
	Redundant Power Supplies	
	Optical Drive supported via Universal Media Bay	
	NOTE: 8SFF Chassis via VGA, USB 2.0 and DVD-RW Option kit: 764732-B21;	
	4LFF Chassis via DVD-RW 726537-B21, DVD 726536-B21 and the Optical Cable: 766203-B21.	

Standard Features

Industry Standard Compliance	ACPI 2.0b Compliant
	PCIe 3.0 Compliant
	PXE Support
	WOL Support
	Microsoft® Logo certifications
	USB 3.0 Support
	Energy Star
	ASHRAE A3/A4

NOTE: The DL360 Gen9 is now one of the first HPE ProLiant Gen9 Servers with Extended Ambient Support up to 45 C for data center infrastructures designed for better energy efficiency such as but not limited to fresh air cooling. For additional technical thermal details regarding ambient temperatures, humidity and features support please visit <https://www.hp.com/servers/ashrae>.

Graphics	Integrated Matrox G200 video standard
----------	---------------------------------------

- 1280 x 1024 (32 bpp)
- 1920 x 1200 (16 bpp)

HPE Server UEFI/Legacy ROM	HPE Server UEFI /Legacy ROM
----------------------------	-----------------------------

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration while interacting with your server at boot time. HPE ProLiant Gen9 platform defaults to UEFI and can be factory or field configured for Legacy BIOS Boot Mode.

NOTE: The UEFI System Utilities function is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hp.com/go/proliantuefi/docs>.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using HPE RESTful API.
- PXE boot support for IPv6 networks
- Boot support for option cards that only support a UEFI option ROM

For more information please visit <http://www.hp.com/go/proliant/uefi>.

NOTE: For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

NOTE: HPE Legacy FIO Mode Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory.

Standard Features

Form Factor	1U Rack form factor
One of the following depending on model	8 SFF Drive Bay Version and 10 SFF Drive Bay Version: 1.7" (4.32cm) Height x 17.11" (43.47cm) Width x 27.5" (69.85cm) Length 4 LFF Drive Bay Version: 1.7" (4.32cm) Height x 17.11" (43.47cm) Width x 29.5" (74.67cm) Length
Embedded Management	<p>HPE Integrated Lights-Out (HPE iLO) Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Learn more at http://www.hp.com/go/ilo.</p> <p>UEFI Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at http://www.hp.com/go/ProLiant/uefi.</p> <p>RESTful API A single programmatic web interface that allows you to manage and monitor your server infrastructure using basic HTTP operations (GET, PUT, POST, DELETE and PATCH). RESTful API for iLO 4 conforms to the Redfish 1.0 DMTF standard (iLO firmware version v2.30 or higher required for Redfish conformance). For more details visit: http://www.hp.com/go/restfulapi.</p> <p>Intelligent Provisioning Provision servers by discovering and deploying 1 to few servers with Intelligent Provisioning. Learn more at http://www.hp.com/go/intelligentprovisioning.</p> <p>Embedded Remote Support Hewlett Packard Enterprise's embedded remote support, used with Insight Online direct connect or HPE Insight Remote Support, allows HPE ProLiant servers to transmit hardware events directly to HPE or an HPE Authorized Partner for automated phone home support. Learn more at http://www.hp.com/go/insightonline/info.</p>
Server utilities	<p>Smart Update Optimize firmware and driver updates with Smart Update solutions including Smart Update Manager (SUM) and Service Pack for ProLiant (SPP). Learn more at http://www.hp.com/go/smartupdate.</p> <p>HPE Systems Insight Manager (HPE SIM) HPE SIM allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers, and also provides you with basic support for non-HPE servers. HPE SIM also integrates with SUM to provide quick and seamless firmware updates. Learn more at http://www.hp.com/go/sim.</p> <p>Scripting Tool Kit and Windows PowerShell Provision 1 to many servers using your own scripts to discover and deploy them with Scripting Tool Kit for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at http://www.hp.com/go/ProLiantSTK or http://www.hp.com/go/powershell.</p> <p>RESTful Interface Tool Scripting tool to provision servers using iLO 4 RESTful API to discover and deploy servers at scale. Learn more at http://www.hp.com/go/resttool</p> <p>HPE iLO Mobile Application Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: http://www.hp.com/go/ilo/mobileapp.</p> <p>HPE Insight Online HPE Insight Online, available at no additional cost as part of your Hewlett Packard Enterprise warranty, Care Pack or contractual</p>

Standard Features

support agreement with Hewlett Packard Enterprise, is a personalized dashboard for simplified tracking of IT operations and support information from anywhere, anytime. Learn more at <http://www.hp.com/go/insightonline/info>.

Security

Power-on password
Keyboard password
QuickLock, Network Server Mode
Serial interface control
Administrator's password
iLO 4 (Integrated Lights-Out 4) has 12 customizable user accounts and SSL encryption
iLO 4 can be disabled via a Global Setting
iLO Advanced supports directory services integration
TPM 1.2
UEFI

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

Optional Features

Server Management	HPE Insight Control	HPE Insight Control, lets you deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see http://www.hp.com/go/insightcontrol .
	HPE OneView	Powerful converged management of servers, storage, and network for IT service automation and infrastructure simplicity, see http://www.hp.com/go/oneview .
	HPE Insight Cluster Management Utility (CMU)	HPE Insight Cluster Management Utility is a hyperscale-optimized management framework that includes software for the provisioning, control, performance management and monitoring of groups of nodes and infrastructure. Learn more at http://www.hp.com/go/cmu .
Rack and Power Infrastructure	HPE Rack and Power Infrastructure products and services create highly efficient and intelligent solutions for existing or new IT data centers. HPE Rack and Power infrastructure solutions – rack infrastructure, power protection and management, performance optimized data centers (PODs) – are the foundation you are looking for to help secure your long-term IT success. These products are designed to help you react to changes in the industry. They deliver efficient, easy-to-use capabilities to manage, monitor, deploy and provision infrastructure from entry to enterprise. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access. Learn more at HPE Rack and Power Infrastructure .	
High Performance Clusters	HPE Insight Cluster Management Utility (CMU)	HPE Insight Cluster Management Utility is a Hyperscale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at http://www.hp.com/go/cmu .
HPC Interconnects	NOTE: High Performance Computing (HPC) interconnect technologies are available for this server under the HPE Cluster Platform product portfolio. These high-speed interconnects are fully supported by Hewlett Packard Enterprise when they are part of these configure to order clusters. Solutions can be defined with a lot of flexibility with the help of configuration tools. Please visit the following URL to configure HPEC Clusters with InfiniBand Interconnects: http://www.hp.com/techservers/clusters/ucp/index.html .	

Optional Features

Storage Software

Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than HPE storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities.

Storage software that gets the job done:

- **Data Protection and Recovery Software**
Whether you're a large enterprise or a smaller business, HPE data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.
- **Data Archive and Migration Software**
Hewlett Packard Enterprise's storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.
- **Storage Resource Management Software (SRM)**
Hewlett Packard Enterprise's storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.
- **Data Replication Software**
Hewlett Packard Enterprise offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.
- **Storage Device Management Software**
Maximize your investment in HPE storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management.
- **HPE StoreVirtual VSA**
With HPE StoreVirtual VSA you can use the power of virtualization to create a virtual array within your host server. Manage it as a single pool of shared storage capacity, and scale it to match your evolving needs. HPE ProLiant Gen9 servers include a 3-year limited license for HPE StoreVirtual VSA software with 1TB of capacity at no extra cost. Simply select to install HPE StoreVirtual VSA software during server setup within Intelligent Provisioning. More information, instructional videos, and free console management software are available at <http://www.hp.com/go/vsa1TB>.

NOTE: For more information about Storage Software including QuickSpecs, please see: <http://www.hp.com/go/storage/software>.

One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise's Customer Business Center or an Authorized Partner for assistance. <https://h22174.www2.hp.com/SimplifiedConfig/Index>.

Service and Support

HPE Technology Services

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to Hewlett Packard Enterprise to help prevent problems and solve issues faster. Our support technology lets you to tap into the knowledge of millions of devices and thousands of experts to stay informed and in control, anywhere, any time.

Protect your business beyond warranty with HPE Care Pack Services

HPE Care Pack Services enable you to order the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement for the term you select.

Optimized Support recommendation

HPE Proactive Care - Call to Repair commitment, 24x7 coverage, three year Care Pack Service

Prevent problems and stabilize IT by utilizing secure, real-time, predictive analytics and proactive consultations when your products are connected to Hewlett Packard Enterprise. Includes enhanced escalation management and the industry's highest level of hardware support commitment – hardware will be returned to operating conditions within six (6) hours after you open your case. Comes with collaborative software call management with two hour call back to reduce troubleshooting.

As a leading global support provider for Microsoft, Red Hat, VMware, SUSE and other operating systems, Hewlett Packard Enterprise is able to simplify and shorten your time to resolution with one call for hardware or software questions. <http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf>.

HPE ProLiant Server Hardware Installation

Help ensure your new HPE ProLiant hardware is installed smoothly, efficiently and with minimal disruption to your IT and business operations. <http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf>.

Standard Support recommendation

HPE Proactive Care - 24x7 coverage, three year Care Pack Service

This service helps prevent problems and stabilize IT by utilizing secure, real-time, predictive analytics and proactive consultations when your products are connected to HPE. Includes four hour response for hardware, and collaborative call management for software with a two hour callback.

<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

Service and Support

HPE ProLiant Hardware Installation

Help ensure your new HPE ProLiant hardware is installed smoothly, efficiently and with minimal disruption to your IT and business operations.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf>

Related Services

Data Center Platform Consulting Services

These services help modernize key systems and leverage new technology to support a changing business climate and prepare you for the new style of IT. Hewlett Packard Enterprise understands the needs of the data center of the future and will serve as your guide for the journey. <http://www.hp.com/services/consulting>

Data Privacy Services

Protect your data through better media management. HPE Data privacy services help manage and protect sensitive data. <http://www.hp.com/services/dataprivacy>

Factory Express for Servers and storage

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Choose how your factory solutions are built, tested, integrated, shipped and deployed. <http://www.hp.com/go/factory-express>

HPE Foundation Care

Hardware and software support services provide easy connection to Hewlett Packard Enterprise to resolve support issues quickly. Includes collaborative call management for industry leading software; full software support may also be purchased, giving you one place to call for help. <http://www.hp.com/services/foundationcare>

Additional HPE Care Pack services can be found at: <http://www.hp.com/go/cpc>

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual,

Service and Support

product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

Pre-configured Models

For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

1. Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.
2. Hewlett Packard Enterprise does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.
3. If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.
4. Not all models are available in all regions. Check with your local country Hewlett Packard Enterprise offices for availability.

NOTE: All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either P/N 666987-B21: HPE SFF Hard Drive Blank Kit or P/N 666986-B21: HPE LFF Hard Drive Blank Kit.

NOTE: All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

CAUTION: Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

Please refer to the following table for any installation.

	Entry Models		Base Models
[SKU Number]	755260-B21	755261-B21	755262-B21
Model Name	HP ProLiant DL360 Gen9 E5-2603v3 1P 8GB-R B140i 500W PS Entry SATA Server	HP ProLiant DL360 Gen9 E5-2603v3 1P 8GB-R H240ar 500W PS Entry SAS Server	HP ProLiant DL360 Gen9 E5-2630v3 1P 16GB-R P440ar 500W PS Base SAS Server
Processor	Intel® Xeon® E5-2603v3		Intel® Xeon® E5-2630v3
Number of Processors	One		
Memory	8GB (1x8GB Registered DIMMs, 2133 MHz) NOTE: The DIMM will operate at 1600 MHz with the E5-2603v3 Processor.		16GB (1x16GB Registered DIMMs, 2133 MHz) NOTE: The DIMM will operate at 1866 MHz with the E5-2603v3 Processor.
Network Controller	HPE Embedded 1Gb Ethernet 4-port 331i Adapter		
Storage Controller	HPE Dynamic Smart Array B140i	HPE H240ar Smart Host Bus Adapter	HPE Flexible Smart Array P440ar/2GB
Hard Drive	None ship standard NOTE: Only Supports SATA HDD unless HPE Smart HBA or HPE Smart Array Controller is added.	None ship standard	
Internal Storage	8 SFF HDD Bays		
Optical Drive Bay	Optional via Universal Media Bay		

Pre-configured Models

PCI-Express Slots	2 Standard (1-FH/¾ L, 1-LP) PCIe 3.0
Power Supply	(1) HPE 500W Flex Slot Platinum Power Supply
Fans	5 Standard hot plug fans, redundant
Management	iLO Management (standard), Intelligent Provisioning (standard), iLO Advanced (optional), Insight Control (optional), HPE OneView (optional)
Form Factor	Rack (1U), HPE Easy Install Rails
Warranty	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response

	Performance Models	
[SKU Number]	755263-B21	795236-B21
Model Name	HP ProLiant DL360 Gen9 E5-2650v3 2P 32GB-R P440ar 800W RPS Performance SAS Server	HP ProLiant DL360 Gen9 E5-2670v3 2P 64GB P440ar 8SFF 2x10Gb-T 2x800W OneView Server
Processor	Intel® Xeon® E5-2650v3	Intel® Xeon® E5-2670v3
Number of Processors	Two	
Memory	32GB (2x16GB Registered DIMMs, 2133 MHz)	64GB (4x16GB Registered DIMMs, 2133 MHz)
Network Controller	HPE Embedded 4x1Gb, plus 2x10Gb FLR-T FlexFabric Flexible LOM	
Storage Controller	HPE Flexible Smart Array P440ar/2GB	
Hard Drive	None ship standard	
Internal Storage	8 SFF HDD Bays	
Optical Drive Bay	Optional via Universal Media Bay	
PCI-Express Slots	2 Standard (1-FH/¾ L, 1-LP) PCIe 3.0	3 Standard (1-FH/HL, 2-LP) PCIe 3.0
Power Supply	(2) HPE 800W Flex Slot Platinum Power Supply	
Fans	7 standard hot plug fans, redundant	
Management	iLO Management (standard), Intelligent Provisioning (standard), iLO Advanced (standard), HPE OneView (optional)	iLO Management (standard), Intelligent Provisioning (standard), iLO Advanced (standard), HPE OneView Advanced (Standard)
Energy Star	Meets Energy Star requirements	
Form Factor	Rack (1U), HPE Easy Install Rails	
Warranty	Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response	

Country Code	xx1 = B21	Worldwide
Key	xx1 = 291	Japan
	xx1 = AA1	PRC



Configuration Information - Factory Integrated Models

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

1. Factory Integrated Models must start with a CTO Server.
2. FIO indicates that this option is only available as a factory installable option.
3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Step 1: Base Configuration (choose one of the following configurable models)

[Chassis]	HP ProLiant DL360 Gen9 4LFF Configure-to-order Server	HP ProLiant DL360 Gen9 8SFF Configure-to-order Server
SKU Number	755259-B21	755258-B21
Processor	2 (optional) x HPE Smart Socket Guide	
DIMM Slots	24 DIMM slots for RDIMM, LRDIMM DDR4 Memory	
Storage Controller	HPE Dynamic Smart Array B140i	
PCIe	2 PCIe 3.0 Slots: Slot 1, FH / $\frac{3}{4}$ Length; Slot 2, Low Profile	
Drive Cage	4LFF Hot Plug	8SFF Hot Plug
Network Controller	HPE Embedded 1Gb Ethernet 4-port 331i Adapter	
Fans	5 Standard hot plug fans, redundant	
Management	iLO Management (standard), Intelligent Provisioning (standard), iLO Advanced (optional), Insight Control (optional), HPE OneView (optional)	
USB	1 front, 2 internal, 2 rear	
Ears	HPE Quick Release Ears	

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

NOTE: Factory Integrated Models must start with a CTO Server.

NOTE: FIO indicates that this option is only available as a factory installable option.

NOTE: All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.

NOTE: 4LFF CTO Chassis includes 1 SATA Cable, option kit: 766213-B21, which attaches to the B140i controller.

NOTE: 8SFF CTO Chassis includes two 4 x Mini-SAS Cables, option kit: 766209-B21, which attaches to an optional HPE Smart HBA H240ar or HPE Smart Array P440ar controller.

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

Configuration Information - Factory Integrated Models

HPE Processors Select one or two processors from Core options-Processor section below,

- If one processor is desired, select one xxxxxx-L21
- If two processors are desired, select one xxxxxx-L21 and one xxxxxx-B21.
- Up to 2 processors supported. Mixing different processor models is not supported.
- DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

For the Intel® C600 Chipset E5-2600 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x v#, 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, x = L for low power SKUs and v# (not yet designated) = version number.

HPE Memory Select one or more memory from Core options-Memory section below,

- LRDIMM, RDIMM are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen9 servers support LRDIMM and RDIMM.
- HPE memory from previous generation servers are not qualified or warranted with this HPE ProLiant Server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9.
- If only one processor is installed, only half of the total DIMM slots are available. When populating with two processors all DIMM slots are available.
- Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: <http://www.hp.com/go/proliant-energy-efficient>.
- Depending on the memory configuration and processor model, the memory speed may run at 2133MHz, 1866MHz, 1600MHz or 1333MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: <http://www.hp.com/go/ddr4config>.

HPE Power Supplies Select one or more power supplies from Core Options-Power Supplies section below:

- Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HPE Power Advisor tool to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <http://www.hp.com/go/hppoweradvisor>.
- Mixing of power supplies in the same server is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.

Step 3: Choose Additional Factory Integratable Options

HPE Unique Options Select one or more Unique options from Core options section below.

- This section may contain FIO options, please see the Unique Options section below.
- FIO indicates that this option is only available as a factory installable option.

HPE Drives Select one or more drives from Core options-HPE Drives section below:

- The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all

Configuration Information - Factory Integrated Models

	<p>components.</p> <ul style="list-style-type: none"> • Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details. • The HPE ProLiant Gen9 Smart Storage solutions are equipped with re-designed Small Form Factor (SFF 2.5 in) and Large Form Factor (LFF 3.5 in) hot plug carriers for HPE Qualified Hard Drives and Solid State Drives. These new carriers provide status and activity indicators as well as caution indicators for "Do Not Remove".
HPE Flexible LOM	<p>Select a FlexibleLOM from Core options-Networking section below,</p> <ul style="list-style-type: none"> • Only one FlexibleLOM can be added to the server. These options are upgradeable and can be changed from the original configuration after the server is shipped. • For 10 GB adapters, a minimum of two Gigabytes (2 GB) of server memory is required per each adapter. • Please see the QuickSpecs for Technical Specifications and additional information: http://www.hp.com/go/ProLiantNICs.
HPE Networking	<p>Select a standup NIC adapter from Core options-Networking section below,</p> <ul style="list-style-type: none"> • Please see the QuickSpecs for Technical Specifications and additional information: http://www.hp.com/go/ProLiantNICs. • These options are upgradeable and can be changed from the original configuration after the server is shipped. • For 10 GB adapters, a minimum of two Gigabytes (2 GB) of server memory is required per each adapter.
HPE Storage Controllers	<p>Select one or more Storage options from Additional options section below.</p> <ul style="list-style-type: none"> • The embedded B140i controller will operate in UEFI only mode. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22 • This section may contain FIO options, please see HPE Storage Controllers section below. • FIO indicates that this option is only available as a factory installable option.
HPE Graphics Options	<p>Select one or more graphics adapter from Additional options section below.</p> <ul style="list-style-type: none"> • Please see the HPE Power Advisor for estimated power consumption of your individual system configuration prior to installing GPUs. The HPE Power Advisor is located at: http://www.hp.com/go/hppoweradvisor. • This section may contain FIO options, please see HPE Computation & Graphics Accelerators section below.
HPE I/O Expansion Options	<p>Select one or more Riser Kit options from Core options section below.</p> <ul style="list-style-type: none"> • To take advantage of the additional PCI slot upgrade, the second processor must be installed. • This section may contain FIO options, please see HPE I/O Expansion Options section below. • FIO indicates that this option is only available as a factory installable option.
HPE Cooling Options	<p>Select one or more Fan Kits from Core options section below.</p> <ul style="list-style-type: none"> • This section may contain FIO options, please see HPE Cooling Options section below. • FIO indicates that this option is only available as a factory installable option.
HPE Rail Kits	<p>Select one type of rail kit from Additional options section below.</p>



Configuration Information - Factory Integrated Models

- Please take a moment to review the installation documentation that comes with the server to help you with the installation of your Gen9 server.
- To assist in the installation of the server into the rack, an optional installation tool is available by contacting your local services representative (p/n 695539-001).
- See HPE Rack Options in Additional Options section of this QuickSpecs for more rack kit choices.

CAUTION: Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

HPE Unique Options	HP DL360 Gen9 2SFF SAS/SATA Universal Media Bay Kit	764630-B21
	NOTE: Required when upgrading an 8SFF config to a 10SFF config, not supported in 4LFF Chassis; when this option kit is installed it cannot be used in conjunction with the optical drive or USB 2.0/VGA option kits.	
	NOTE: Adds 2SFF drives to the 8SFF model for a total of 10SFF SAS/SATA drives. This kit comes with the cable needed to attach the 2 drives to the internal B140i SATA controller. For SAS, an alternate storage controller and its associated cable kit are required.	
	HP DL360 Gen9 SFF DVD-RW/USB Universal Media Bay Kit	764632-B21
	NOTE: DVD RW (Drive Included), USB 2.0, and VGA; when this option kit is installed it cannot be used in conjunction with the 2 SFF SAS/SATA option kit.	
	HP DL360 Gen9 SFF USB/VGA Universal Media Bay Kit	764634-B21
	NOTE: Front USB 2.0 and VGA, when this option kit is installed it cannot be used in conjunction with the 2 SFF SAS/SATA option kit.	
	HP DL360 Gen9 SFF DVD-ROM/USB Universal Media Bay Kit	818213-B21
	HP DL360 Gen9 Location Discovery Services Ear Kit	764757-B21
	NOTE: Requires ProLiant Location Discovery Services Infrastructure within server racks.	
	HP DL360 Gen9 Rear Serial Port and Enablement Kit	764646-B21
	HP DL360 Gen9 SFF Systems Insight Display Kit	764636-B21
	NOTE: For the 8SFF or 10SFF models, adds a System Insight Display for improved diagnosis capabilities.	
	HP DL360 Gen9 LFF USB/VGA Kit	764638-B21
	NOTE: Adds front VGA and USB 2.0 ports to LFF.	
	HP DL360 Gen9 LFF Systems Insight Display Kit	764640-B21
	NOTE: For the 8SFF or 10SFF models, adds a System Insight Display for improved diagnosis capabilities.	
	NOTE: Options noted with "DL360 Gen9 SFF..." are options only compatible with the 8 SFF Chassis; and Options noted with "DL360 Gen9 LFF..." are options only compatible with the 4LFF Chassis.	
	HP DL360 Gen9 High Performance Heat Sink Kit	795235-B21
	NOTE: These are included in some higher Watt processors (see processor section), but may be added to lower power processors to reduce fan power consumption.	
	HP DL360 Gen9 NVMe 2 Solid State Drive Express Bay Enablement Kit	764628-B21
	NOTE: This option provides support for up to 2NVMe drives in SFF only. Adding NVMe drives replaces support for Universal media bay.	
	NOTE: The HP DL360 Gen9 High Performance Fan Kit (766201-B21) is required with the NVMe enablement kit.	
	NOTE: The PCIe card in this enablement kit can only be populated in slot1 of primary riser or in slot3 of secondary optional FH riser.	

Core Options

HP DL360 Gen9 6 NVMe + 4 SAS/SATA Express Bay Enablement Kit 817676-B21

NOTE: This option provides support for up to 4 NVMe drives (drives 5-8).

NOTE: The HPE DL360 Gen9 High Performance Fan Kit (719079-B21) is required for the 4 NVMe + 4 SAS/SATA kit.

NOTE: The PCIe card in this enablement kit can only be populated in slot1 of primary riser.

HPE Processors Entry Processors - E5-2600v3 series Processors

HP DL360 Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W) Processor Kit 755374-B21

HP DL360 Gen9 Intel® Xeon® E5-2603v3 (1.6GHz/6-core/15MB/85W) FIO Processor Kit 755374-L21

HP DL360 Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) Processor Kit 755378-B21

HP DL360 Gen9 Intel® Xeon® E5-2609v3 (1.9GHz/6-core/15MB/85W) FIO Processor Kit 755378-L21

Base Processors - E5-2600v3 series Processors

HP DL360 Gen9 Intel® Xeon® E5-2623v3 (3GHz/4-core/10MB/105W) Processor Kit 755376-B21

HP DL360 Gen9 Intel® Xeon® E5-2623v3 (3GHz/4-core/10MB/105W) FIO Processor Kit 755376-L21

HP DL360 Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W) Processor Kit 755382-B21

HP DL360 Gen9 Intel® Xeon® E5-2620v3 (2.4GHz/6-core/15MB/85W) FIO Processor Kit 755382-L21

HP DL360 Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W) Processor Kit 755384-B21

HP DL360 Gen9 Intel® Xeon® E5-2630v3 (2.4GHz/8-core/20MB/85W) FIO Processor Kit 755384-L21

HP DL360 Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) Processor Kit 755386-B21

HP DL360 Gen9 Intel® Xeon® E5-2640v3 (2.6GHz/8-core/20MB/90W) FIO Processor Kit 755386-L21

HP DL360 Gen9 Intel® Xeon® E5-2637v3 (3.5GHz/4-core/15MB/135W) Processor Kit 755404-B21

HP DL360 Gen9 Intel® Xeon® E5-2637v3 (3.5GHz/4-core/15MB/135W) FIO Processor Kit 755404-L21

HP DL360 Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) Processor Kit 764097-B21

HP DL360 Gen9 Intel® Xeon® E5-2630Lv3 (1.8GHz/8-core/20MB/55W) FIO Processor Kit 764097-L21

Performance Processors - E5-2600v3 series Processors

HP DL360 Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10-core/25MB/105W) Processor Kit 755388-B21

HP DL360 Gen9 Intel® Xeon® E5-2650v3 (2.3GHz/10-core/25MB/105W) FIO Processor Kit 755388-L21



Core Options

HP DL360 Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) Processor Kit	755390-B21
HP DL360 Gen9 Intel® Xeon® E5-2660v3 (2.6GHz/10-core/25MB/105W) FIO Processor Kit	755390-L21
HP DL360 Gen9 Intel® Xeon® E5-2670v3 (2.3GHz/12-core/30MB/120W) Processor Kit	755392-B21
HP DL360 Gen9 Intel® Xeon® E5-2670v3 (2.3GHz/12-core/30MB/120W) FIO Processor Kit	755392-L21
HP DL360 Gen9 Intel® Xeon® E5-2680v3 (2.5GHz/12-core/30MB/120W) Processor Kit	755394-B21
HP DL360 Gen9 Intel® Xeon® E5-2680v3 (2.5GHz/12-core/30MB/120W) FIO Processor Kit	755394-L21
HP DL360 Gen9 Intel® Xeon® E5-2690v3 (2.6GHz/12-core/30MB/135W) Processor Kit	755396-B21
HP DL360 Gen9 Intel® Xeon® E5-2690v3 (2.6GHz/12-core/30MB/135W) FIO Processor Kit	755396-L21
HP DL360 Gen9 Intel® Xeon® E5-2683v3 (2GHz/14-core/35MB/120W) Processor Kit	755398-B21
HP DL360 Gen9 Intel® Xeon® E5-2683v3 (2GHz/14-core/35MB/120W) FIO Processor Kit	755398-L21
HP DL360 Gen9 Intel® Xeon® E5-2695v3 (2.3GHz/14-core/35MB/120W) Processor Kit	755400-B21
HP DL360 Gen9 Intel® Xeon® E5-2695v3 (2.3GHz/14-core/35MB/120W) FIO Processor Kit	755400-L21
HP DL360 Gen9 Intel® Xeon® E5-2697v3 (2.6GHz/14-core/35MB/145W) Processor Kit	755402-B21
HP DL360 Gen9 Intel® Xeon® E5-2697v3 (2.6GHz/14-core/35MB/145W) FIO Processor Kit	755402-L21
HP DL360 Gen9 Intel® Xeon® E5-2643v3 (3.4GHz/6-core/20MB/135W) Processor Kit	755406-B21
HP DL360 Gen9 Intel® Xeon® E5-2643v3 (3.4GHz/6-core/20MB/135W) FIO Processor Kit	755406-L21
HP DL360 Gen9 Intel® Xeon® E5-2667v3 (3.2GHz/8-core/20MB/135W) Processor Kit	755408-B21
HP DL360 Gen9 Intel® Xeon® E5-2667v3 (3.2GHz/8-core/20MB/135W) FIO Processor Kit	755408-L21
HP DL360 Gen9 Intel® Xeon® E5-2687Wv3 (3.1GHz/10-core/25MB/160W) Processor Kit	755410-B21
HP DL360 Gen9 Intel® Xeon® E5-2687Wv3 (3.1GHz/10-core/25MB/160W) FIO Processor Kit	755410-L21
HP DL360 Gen9 Intel® Xeon® E5-2698v3 (2.3GHz/16-core/40MB/135W) Processor Kit	764099-B21
HP DL360 Gen9 Intel® Xeon® E5-2698v3 (2.3GHz/16-core/40MB/135W) FIO Processor Kit	764099-L21
HP DL360 Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W) Processor Kit	764101-B21
HP DL360 Gen9 Intel® Xeon® E5-2650Lv3 (1.8GHz/12-core/30MB/65W) FIO Processor Kit	764101-L21

Core Options

HP DL360 Gen9 Intel® Xeon® E5-2699v3 (2.3GHz/18-core/45MB/145W) Processor Kit	780003-B21
HP DL360 Gen9 Intel® Xeon® E5-2699v3 (2.3GHz/18-core/45MB/145W) FIO Processor Kit	780003-L21
NOTE: Processor XXXXXX-B21 option kits include 1 heat sink and two additional fans for 2P configs.	

HPE Memory	Registered DIMMs (RDIMMs) for E5-2600v3 Series	
	HP 32GB (1x32GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	728629-B21
	HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726719-B21
	HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726718-B21
	HP 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit	759934-B21
	HP 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726717-B21
	Load Reduced DIMMs (LRDIMMs) for E5-2600v3 Series	
	HP 64GB (1x64GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726724-B21
	HP 32GB (1x32GB) Quad Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726722-B21
	HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726720-B21
	NOTE: Memory speeds will vary by processor model, please see memory section of QuickSpecs.	

HPE Optical Drives	HP 9.5mm SATA DVD-ROM JackBlack Gen9 Optical Drive	726536-B21
	NOTE: Supported only with the 4LFF Models & requires cable kit 766203-B21.	
	HP 9.5mm SATA DVD-RW JackBlack G9 Optical Drive	726537-B21
	NOTE: Supported only with the 4LFF Models & requires cable kit 766203-B21.	
	HP DL360 Gen9 LFF Optical Cable	766203-B21
	HP DL360 Gen9 SFF DVD-ROM/USB Universal Media Bay Kit	818213-B21
	HP DL360 Gen9 SFF DVD-RW/USB Universal Media Bay Kit	764632-B21
	NOTE: Front DVD-RW, USB 2.0 and VGA, and optical cable.	
	HP Mobile USB Non Leaded System DVD RW Drive	701498-B21
	NOTE: External USB Drive.	

HPE Drives	SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives
------------	---

Core Options

HP 1.8TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 512e 3yr Warranty Hard Drive	791034-B21
HP 1.2TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	781518-B21
HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Dual Port Enterprise 3yr Warranty Hard Drive	718162-B21
HP 900GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	785069-B21
HP 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652589-B21
HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC 512e Enterprise 3yr Warranty Hard Drive	748387-B21
HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759212-B21
HP 600GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	781516-B21
HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652583-B21
HP 450GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759210-B21
HP 450GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652572-B21
HP 300GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759208-B21
HP 300GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	785067-B21
HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652564-B21
HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652605-B21
SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives	
HP 2TB 12G SAS 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765466-B21
HP 1TB 12G SAS 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765464-B21
HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	652749-B21
HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	652745-B21
SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives	
HP 600GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	765424-B21
HP 450GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	737394-B21
HP 300GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	737261-B21
SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives	

Core Options

HP 8TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive	793703-B21
HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive	793699-B21
HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765259-B21
HP 6TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	761477-B21
HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive	793671-B21
HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765257-B21
HP 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	695510-B21
HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive	793669-B21
HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652766-B21
HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652757-B21
HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652753-B21
SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives	
HP 2TB 6G SATA 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765455-B21
HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765453-B21
HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	655710-B21
HP 500GB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	655708-B21
HP 80GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804575-B21
HP 1.2TB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804677-B21
HP 120GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804581-B21
HP 800GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804671-B21
HP 240GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804587-B21
HP 400GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804665-B21
HP 480GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804593-B21
HP 200GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804639-B21
HP 800GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804599-B21

Core Options

HP 480GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	832414-B21
HP 1.6TB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804605-B21
HP 1.6TB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804631-B21
HP 200GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804613-B21
HP 800GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804625-B21
HP 120GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816879-B21
HP 240GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816889-B21
HP 480GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816899-B21
HP 960GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816909-B21
HP 1.92TB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816919-B21
HP 3.84TB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816929-B21
HP 120GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816965-B21
HP 240GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816975-B21
HP 480GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816985-B21
HP 960GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816995-B21
HP 1.92TB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	817011-B21
SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives	
HP 8TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive	793695-B21
HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive	793683-B21
HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765255-B21
HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	753874-B21
HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive	793667-B21
HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765253-B21
HP 4TB 6G SATA 7.2k rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	693687-B21
HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drives	793665-B21

Core Options

HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	628061-B21
HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	658079-B21
HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	657750-B21
HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	658071-B21
HP 80GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804578-B21
HP 120GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804584-B21
HP 240GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804590-B21
HP 480GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804596-B21
HP 800GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804602-B21
HP 1.6TB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804608-B21
HP 200GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804616-B21
HP 800GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804628-B21
HP 1.6TB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804634-B21
HP 200GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804642-B21
HP 400GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804668-B21
HP 800GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804674-B21
HP 1.2TB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804680-B21
HP 480GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	832417-B21
HP 120GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816883-B21
HP 240GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816893-B21
HP 480GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816903-B21
HP 960GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816913-B21
HP 1.92TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816923-B21
HP 3.84TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816933-B21

Core Options

HP 120GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816969-B21
HP 240GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816979-B21
HP 480GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816989-B21
HP 960GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816999-B21
HP 1.92TB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	817015-B21
12G SAS Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives	
HP 1.92TB 12G SAS Read Intensive SFF 2.5-in SC 3yr Wty Solid State Drive	802891-B21
HP 1.6TB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive	779176-B21
HP 800GB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive	779172-B21
HP 800GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid State Drive	802586-B21
HP 400GB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive	779168-B21
HP 400GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid State Drive	802582-B21
HP 200GB 12G SAS Mainstream Endurance SFF 2.5-in ENT Mainstream SC 3yr Wty H2 Solid State Drive	779164-B21
HP 200GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid State Drive	802578-B21
HPE 480GB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty FIO Solid State Drive	816562-B21
HPE 960GB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty FIO Solid State Drive	816568-B21
HPE 1.92TB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty FIO Solid State Drive	816572-B21
HPE 3.84TB 12G SAS Read Intensive-3 SFF 2.5-in SC 3yr Wty FIO Solid State Drive	816576-B21
HPE 400GB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty FIO Solid State Drive	822555-B21
HPE 800GB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty FIO Solid State Drive	822559-B21
HPE 1.6TB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty FIO Solid State Drive	822563-B21
HPE 3.2TB 12G SAS Mixed Use-3 SFF 2.5-in SC 3yr Wty FIO Solid State Drive	822567-B21
12G SAS Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives	
HP 1.6TB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	762263-B21
HP 800GB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	762261-B21

Core Options

12G SAS Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives	
HP 1.6TB 12G SAS Value Endurance LFF 3.5-in SC Enterprise Value	762272-B21
3yr Wty Solid State Drive	
HP 800GB 12G SAS Value Endurance LFF 3.5-in SC Enterprise	762270-B21
Value 3yr Wty Solid State Drive	
6G SATA Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives	
HP 800GB 6G SATA Mainstream Endurance SFF 2.5-in SC	691868-B21
Enterprise Mainstream 3yr Wty Solid State Drive	
HP 400GB 6G SATA Mainstream Endurance SFF 2.5-in SC	691866-B21
Enterprise Mainstream 3yr Wty Solid State Drive	
HP 200GB 6G SATA Mainstream Endurance SFF 2.5-in SC	691864-B21
Enterprise Mainstream 3yr Wty Solid State Drive	
HP 100GB 6G SATA Mainstream Endurance SFF 2.5-in SC	691862-B21
Enterprise Mainstream 3yr Wty Solid State Drive	
6G SATA Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives	
HP 1.6TB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value	757339-B21
3yr Wty Solid State Drive	
HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise	717973-B21
Value 3yr Wty Solid State Drive	
HP 600GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise	739898-B21
Value 3yr Wty Solid State Drive	
HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise	717971-B21
Value 3yr Wty Solid State Drive	
HP 300GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise	739888-B21
Value 3yr Wty Solid State Drive	
HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise	717969-B21
Value 3yr Wty Solid State Drive	
6G SATA Hot Plug SFF Value Endurance (2.5-inch) Enterprise Value G1 Solid	
State Drives	
HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise	756657-B21
Value 3yr Wty G1 Solid State Drive	
HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise	756636-B21
Value 3yr Wty G1 Solid State Drive	
HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise	756621-B21
Value 3yr Wty G1 Solid State Drive	
HP 960GB 6G SATA Light Endurance SFF 2.5-in SC Enterprise Light	756601-B21
3yr Wty G1 Solid State Drive	
6G SATA Hot Plug SFF (2.5-inch) SC Read Intensive Solid State Drives	
HP 480GB 6G SATA Read Intensive SFF 2.5-in SC 3yr Wty Solid	789145-B21
State Drive	
HP 240GB 6G SATA Read Intensive SFF 2.5-in SC 3yr Wty Solid	789135-B21
State Drive	
6G SATA Hot Plug SFF Value Endurance (2.5-inch) Enterprise Value M1 Solid	
State Drives	

Core Options

HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764929-B21
HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764927-B21
HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764925-B21
HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764923-B21
6G SATA Hot Plug SFF (2.5-inch) Enterprise Boot Solid State Drives	
HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Boot 3yr Wty Solid State Drive	717965-B21
HP 80GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Boot 3yr Wty Solid State Drive	734360-B21
6G SATA Hot Plug LFF (3.5-inch) Enterprise Mainstream Solid State Drives	
HP 800GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691860-B21
HP 400GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691856-B21
HP 200GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691854-B21
HP 100GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691852-B21
6G SATA Hot Plug LFF Value Endurance (3.5-inch) Converter Enterprise Value G1 Solid State Drives	
HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 Solid State Drive	756660-B21
HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 Solid State Drive	756639-B21
HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty G1 Solid State Drive	756624-B21
6G SATA Hot Plug LFF (3.5-inch) SC Read Intensive Solid State Drives	
HP 480GB 6G SATA Read Intensive LFF 3.5-in SC Converter 3yr Wty Solid State Drive	789147-B21
HP 240GB 6G SATA Read Intensive LFF 3.5-in SC Converter 3yr Wty Solid State Drive	789137-B21
6G SATA Hot Plug LFF Value Endurance (3.5-inch) Converter Enterprise Value M1 Solid State Drives	
HP 800GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive	764945-B21
HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive	764943-B21
HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive	764941-B21
HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive	764939-B21
6G SATA Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives	

Core Options

HP 1.6TB 6G SATA Value Endurance LFF 3.5-in SC Converter Enterprise Value 3yr Wty Solid State Drive	757342-B21
HP 800GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	718189-B21
HP 600GB 6G SATA Value Endurance LFF 3.5-in SC Converter Enterprise Value 3yr Wty Solid State Drive	739900-B21
HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	718183-B21
HP 300GB 6G SATA Value Endurance LFF 3.5-in SC Converter Enterprise Value 3yr Wty Solid State Drive	739890-B21
HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	718177-B21
6G SATA Hot Plug LFF (3.5-inch) Enterprise Boot Solid State Drives	
HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Boot 3yr Wty Solid State Drive	718171-B21
HP 80GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Boot 3yr Wty Solid State Drive	734362-B21
HPE NVMe PCIe Read Intensive SFF (2.5-inch) Solid State Drives	
HP 400GB NVMe PCIe Read Intensive SFF 2.5-in SC2 3yr Wty Solid State Drive	764904-B21
HP 1.2TB NVMe PCIe Read Intensive SFF 2.5-in SC2 3yr Wty Solid State Drive	764906-B21
HPE NVMe PCIe Mixed Use SFF (2.5-inch) Solid State Drives	
HP 400GB NVMe PCIe Mixed Use SFF 2.5-in SC2 3yr Wty Solid State Drive	765034-B21
HP 800GB NVMe PCIe Mixed Use SFF 2.5-in SC2 3yr Wty Solid State Drive	765036-B21
HP 1.6TB NVMe PCIe Mixed Use SFF 2.5-in SC2 3yr Wty Solid State Drive	765038-B21
HPE NVMe PCIe Write Intensive SFF (2.5-inch) Solid State Drives	
HP 400GB NVMe PCIe Write Intensive SFF 2.5-in SC2 3yr Wty Solid State Drive	736936-B21
HP 800GB NVMe PCIe Write Intensive SFF 2.5-in SC2 3yr Wty Solid State Drive	736939-B21
HP 1.6TB NVMe PCIe Write Intensive SFF 2.5-in SC2 3yr Wty Solid State Drive	764892-B21

NOTE: HPE NVMe drives need the enablement kit 764628-B21.

NOTE: Hewlett Packard Enterprise has qualified the NVMe drive portfolio using the Operating System inbox drivers. For full detail please see the Solid State Drive Quickspecs: <http://www8.hp.com/h20195/v2/GetDocument.aspx?docname=c04154378>

M.2 SSD

HP Dual 120GB Value Endurance Solid State M.2 Enablement Kit for ProLiant ML/DL Servers	777894-B21
HP 120GB Value Endurance Solid State M.2 Enablement Kit for ProLiant ML/DL Servers	788028-B21

NOTE: M.2 drives go in PCIe slots and use B140i SATA controller only.

NOTE: M.2 supports Software RAID only.

NOTE: No HPE Flexible Smart Array supported.

Core Options

Hard Drive Blank Kits	
HP Large Form Factor Hard Drive Blank Kit	666986-B21
HP Small Form Factor Hard Drive Blank Kit	666987-B21
Hard Drive Kits	
HP DL360 Gen9 2SFF SAS/SATA Universal Media Bay Kit	764630-B21
NOTE: Not supported in the 4LFF Chassis, required for 10SFF config, when added to the 8SFF Chassis.	
HP DL360 Gen9 NVMe 2 Solid State Drive Express Bay Enablement Kit	764628-B21
NOTE: This option provides support for up to 2NVMe drives in SFF only. Adding NVMe drives replaces support for Universal media bay.	
NOTE: The HP DL360 Gen9 High Performance Fan Kit (766201-B21) is required with the NVMe enablement kit.	
NOTE: The PCIe card in this enablement kit can only be populated in slot1 of primary riser or in slot3 of secondary optional FH riser.	
HP DL360 Gen9 6 NVMe + 4 SAS/SATA Express Bay Enablement Kit	817676-B21
NOTE: This option provides support for up to 4NVMe drives in SFF only.	
NOTE: The HPE DL360 Gen9 High Performance Fan Kit (719079-B21) is required for this kit.	
NOTE: The PCIe card in this enablement kit can only be populated in slot1 of primary riser.	

HPE Networking	1 Gigabit Ethernet adapters	
	HP Ethernet 1Gb 4-port 331T Adapter	647594-B21
	HP Ethernet 1Gb 2-port 332T Adapter	615732-B21
	HP Ethernet 1Gb 2-port 361T Adapter	652497-B21
	HP Ethernet 1Gb 4-port 366T Adapter	811546-B21
	10 Gigabit Ethernet adapters	
	HP Ethernet 10Gb 2-port 530T Adapter	656596-B21
	HP Ethernet 10Gb 2-port 530SFP Adapter	652503-B21
	HP Ethernet 10Gb 2-port 546SFP+ Adapter	779793-B21
	HP Ethernet 10Gb 2-port 557SFP+ Adapter	788995-B21
	HP Ethernet 10Gb 2-port 560SFP+ Adapter	665249-B21
	HP Ethernet 10Gb 2-port 561T Adapter	716591-B21
	NOTE: The DL360 Gen9 chassis ships with 4x1Gb Embedded.	
	NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.	
	NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information:	
	http://www.hp.com/go/ProLiantNICs .	
	FlexibleLOM Adapters	

Core Options

HP Ethernet 1Gb 4-port 331FLR Adapter	629135-B22
HP Ethernet 1Gb 4-port 366FLR Adapter	665240-B21
HP FlexFabric 10Gb 2-port 533FLR-T Adapter	700759-B21
HP FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter	700751-B21
HP Ethernet 10Gb 2-port 546FLR-SFP+ Adapter	779799-B21
HP FlexFabric 10Gb 2-port 556FLR-SFP+ Adapter	727060-B21
HP Ethernet 10Gb 2-port 560FLR-SFP+ Adapter	665243-B21
HP Ethernet 10Gb 2-port 561FLR-T Adapter	700699-B21

NOTE: The DL360 Gen9 chassis ships with 4x1Gb Embedded.

NOTE: Only one FlexibleLOM can be added to the server. These options are upgradeable and can be changed from the original configuration after the server is shipped.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information:
<http://www.hp.com/go/ProLiantNICs>.

HPE InfiniBand	HP InfiniBand FDR 2-port 545QSFP Adapter	702211-B21
	HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter	764284-B21
	HP InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+FLR-QSFP Adapter	764285-B21
	HP InfiniBand QDR/Ethernet 10Gb 2-port 544+FLR-QSFP Adapter	764286-B21
	QLogic InfiniBand 4X QDR PCI-E G2 Dual Port HCA	583211-B21

NOTE: Please see the QuickSpecs for additional information:
http://h18000.www1.hp.com/products/quickspecs/13078_div/13078_div.html.

HPE I/O Expansion Options	HP DL360 Gen9 Low Profile PCIe Slot CPU2 Kit	764642-B21
	NOTE: After installation server will have 1 FH / $\frac{3}{4}$ Length, and 2 Low Profile PCIe 3.0 Slots, requires second CPU.	
	HP DL360 Gen9 Full Height PCIe Slot CPU2 Kit with GPU Power Cable	764644-B21
	NOTE: After installation the server will have 2 FH / $\frac{3}{4}$ Length PCIe 3.0 Slots, requires second CPU.	

NOTE: Includes GPU power cable and bracket; when this option kit is installed the Low Profile PCIe3.0 riser is not useable.

Core Options

HPE Power Supplies

HPE Flex Slot Platinum Hot-plug Power supplies	
HP 500W Flex Slot Platinum Hot Plug Power Supply Kit	720478-B21
NOTE: Flex Slot Platinum power supplies support power efficiency of up to 94% and include a standard C-14 power inlet connector.	
HP 800W Flex Slot Titanium Hot Plug Power Supply Kit	720482-B21
NOTE: Flex Slot Titanium power supplies support power efficiency of up to 96% and include a standard C-14 power inlet connector.	
HP 800W Flex Slot Platinum Hot Plug Power Supply Kit	720479-B21
NOTE: Flex Slot Platinum power supplies support power efficiency of up to 94% and include a standard C-14 power inlet connector.	
HP 800W Flex Slot Universal Hot Plug Power Supply Kit	720484-B21
NOTE: Flex Slot universal power supplies support power efficiency of up to 94% and support both 277VAC/380VDC power inputs.	
HP 800W Flex Slot -48VDC Hot Plug Power Supply Kit	720480-B21
NOTE: Flex Slot -48VDC power supplies support power efficiency of up to 94%.	
HP 1400W Flex Slot Platinum Plus Hot Plug Power Supply Kit	720620-B21
NOTE: Flex Slot Platinum Plus power supplies support power efficiency of up to 94% and include a C-14 power inlet connector that can support HPE Power Discovery Services (blue connector).	
HP 750W Flex Slot Hot Plug Battery Backup Module	738024-B21
NOTE: Flex Slot Battery Backup provides 750W output and 500W in paralleled configuration.	
NOTE: Only 1 Battery Backup module per server, and a Flex Slot Power Supply needed in parallel.	
NOTE: All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.	
NOTE: Mixing different power supplies in the same server may limit or disable some power supply features including support for power redundancy. To ensure access to all available features, all power supplies within the same server should have the same output and efficiency ratings	
NOTE: Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HPE Power Advisor tool to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: http://www.hp.com/go/hppoweradvisor .	
NOTE: Support for HPE Power Discovery Services is included with the 1400W Flex Slot option. Power specifications and technical content for all HPE Server power supplies can be found at http://www.hp.com/go/proliant/powersupply .	
NOTE: Maximum of 2 Flex Slot PS per platform.	

Core Options

HPE Computation and Graphics Accelerators	HP NVIDIA Quadro K4200 Graphics Accelerator	J0G90A
	NOTE: HPE DL360 Gen9 supports up to two K4200 GPU cards. A single K4200 card installed in the primary PCI-e slot requires the Gen9 GPU Cable for CPU1 Kit 766199-B21. Two cards installed in the both the primary and secondary PCI-e slots require an HPE DL360 Gen9 Full Height PCIe Slot CPU2 Kit 764644-B21, and if the HDD need to be RAIDed, the HPE Smart Array P440ar for two GPUS needs to be installed, option kit 726740-B21.	
	HP NVIDIA Quadro K2200 Graphics Accelerator	J0G89A
	NOTE: Supports up to two cards. Two cards installed in the both the primary and secondary PCI-e slots require an HPE DL360 Gen9 Full Height PCIe Slot CPU2 Kit 764644-B21. If two K2200 GPU cards are installed it does not require HPE Smart Array P440ar for two GPU option kits for RAIDed HDDs.	
	HP DL360 Gen9 GPU Cable for CPU1 Kit	766199-B21
	NOTE: Includes GPU power cable and brackets.	
	HP DL360 Gen9 SFF USB/VGA Universal Media Bay Kit	764634-B21
	HP DL360 Gen9 LFF USB/VGA Kit	764638-B21
	NOTE: Only the above listed Graphics cards are HPE standard supported options in this server.	
	NOTE: The NVIDIA Quadro modules are supported only on 64-bit versions of Linux and Windows operating systems as well as on Virtual Machine client operating systems. The supported bare metal operating systems are RHEL6, SLES 11 and Windows Server 2012 R2.	

HPE Cooling Options	HP DL360 Gen9 High Performance Fan Kit	766201-B21
	NOTE: High Performance Fan Kit, is available to meet some extended ambient operating temperatures above 35° C. Qualifications for extended ambient configurations are detailed at: https://www.hp.com/servers/ashrae .	
	NOTE: High performance fan kit increases power consumption. To reduce power consumption use high performance heat sinks (795235-B21).	

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

HPE Insight Software	HPE Insight Control	
	HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License	C6N27A
	HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License	C6N28ABE
	HP Insight Control Server Provisioning Media Kit	BD883A
	HP Insight Management Media Kit	C6N31A
	NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.	

NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24x7 HPE Software Technical Support and Update Service.

NOTE: Licenses ship without media. The HPE Insight Control Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/insightupdates>.

NOTE: For additional license options please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12631_div/12631_div.html.

Embedded Management	HPE iLO Advanced	
	HP iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU	E6U64ABE
	HP iLO Advanced 1 Server License with 3yr 24x7 Tech Support and Updates	BD505A
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License	512485-B21
	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO License	C6N36A
	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle FIO Electronic License	C6N36ABE
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU	E6U59ABE

Additional Options

HPE Converged Infrastructure Management Software	HPE OneView Advanced (with HPE iLO Advanced)	
	HP OneView incl 3yr 24x7 Supp Phys 1 Svr Lic	E5Y34A
	HP OneView incl 3yr 24x7 Supp Flex Qty E-LTU	E5Y35AAE
	HP OneView for ProLiant DL Server incl 3yr 24x7 Supp FIO Bundle Physical 1 Svr Lic	E5Y43A
	HPE OneView Advanced (without HPE iLO Advanced)	
	HP OneView Media Kit Phys No Lic	E5Y37A
	HP Operations Analytics for HP OneView LTU	K8G29A
	HP Operations Analytics for HP OneView E-LTU	K8G29AAE
	NOTE: Full licenses of HPE OneView Advanced also provide the right-to-use HPE Insight Control without additional charge.	
	NOTE: Server provisioning (via 'HPE Insight Control server provisioning') is licensed as part of HPE OneView Advanced and provides multi-server OS and driver provisioning. Media kit #BD883A can be ordered for a physical copy of this software (USB flash drive).	
High Performance Clusters	NOTE: Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: http://www.hp.com/go/oneview .	
	NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.	
	HPE Cluster Management Utility	
	HP Insight Cluster Management Utility 1yr 24x7 Flexible License	QL803B
	HP Insight Cluster Management Utility 3yr 24x7 Flexible License	BD476A
	NOTE: These part numbers can be used to purchase one certificate for multiple licenses and support with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key. Customer also will receive a support agreement.	
	HP Insight Cluster Management Utility Media	BD477A
	NOTE: For additional license kits please see the QuickSpecs at http://h18004.www1.hp.com/products/quickspecs/12612_div/12612_div.html .	

Additional Options

HPE PCIe Workload Accelerator Options	Value Endurance (VE) PCIe Workload Accelerators	
	HP 6.4TB FH/HL Value Endurance (VE) PCIe Workload Accelerator	763840-B21
	HP 3.2TB HH/HL Value Endurance (VE) PCIe Workload Accelerator	763838-B21
	HP 1.6TB HH/HL Value Endurance (VE) PCIe Workload Accelerator	763836-B21
	HP 1.3TB HH/HL Value Endurance (VE) PCIe Workload Accelerator	763834-B21
	HPE 1.3TB Read Intensive-2 HH/HL PCIe Workload Accelerator	831733-B21
	HPE 1.6TB Read Intensive-2 HH/HL PCIe Workload Accelerator	831735-B21
	HPE 3.2TB Read Intensive-2 HH/HL PCIe Workload Accelerator	831737-B21
	HPE 6.4TB Read Intensive-2 FH/HL PCIe Workload Accelerator	831739-B21
	Light Endurance (LE) PCIe Workload Accelerators	
	HP 5.2TB FH/HL Light Endurance (LE) PCIe Workload Accelerator	775672-B21
	HP 2.6TB HH/HL Light Endurance (LE) PCIe Workload Accelerator	775670-B21
	HP 1.3TB HH/HL Light Endurance (LE) PCIe Workload Accelerator	775668-B21
	HP 1.0TB HH/HL Light Endurance (LE) PCIe Workload Accelerator	775666-B21
	NVMe PCIe Workload Accelerators	
	HP 2.0TB NVMe Mixed Use HH/HL PCIe Workload Accelerator	803204-B21
	HP 1.6TB NVMe Mixed Use HH/HL PCIe Workload Accelerator	803202-B21
	HP 1.6TB NVMe Write Intensive HH/HL PCIe Workload Accelerator	803197-B21
	HP 800GB NVMe Mixed Use HH/HL PCIe Workload Accelerator	803200-B21
	HP 800GB NVMe Write Intensive HH/HL PCIe Workload Accelerator	803195-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18004.www1.hp.com/products/quickspecs/14528_div/14528_div.html (Worldwide).	

HPE Security	HP 1U Security Bezel Kit	664918-B21
	HP Trusted Platform Module Option	488069-B21
	NOTE: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline. For more information about TPM, including a white paper, go to: http://www.hp.com/go/TPM .	
	NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment.	
	NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.	

HPE Storage Controllers	SAS Controllers
	HPE Smart Array Controllers

Additional Options

HP Smart Array P440ar/2GB FBWC 12Gb 2-ports Int SAS Controller NOTE: Provides support for up to 8 internal SAS/SATA drives without using a PCIe slot.	726736-B21
HP Smart Array P440ar/2GB FBWC 12Gb 2-ports Int FIO SAS Controller NOTE: Provides support for up to 8 internal SAS/SATA drives without using a PCIe slot.	749974-B21
HP DL360 Gen9 Smart Array P840 SAS Card with Cable Kit NOTE: Includes the P840 Smart Array controller with 4GB integrated cache, HPE Smart Storage Battery, and associated cabling to attach it to a 10SFF chassis configuration.	766205-B21
HP DL360 Gen9 Smart Array P440ar Controller for 2 GPU Configurations NOTE: This controller is specific for the DL360 Gen9 with 2 GPUs installed. It has a unique heatsink that will allow the 2 nd GPU to fit.	726740-B21
HP Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller	726825-B21
HP Smart Array P440/4GB FBWC 12Gb 1-port Int SAS Controller NOTE: Provides support for up to 8 internal SAS/SATA drives, consumes 1 PCIe slot. NOTE: Includes the HPE Smart Storage Battery.	726821-B21
HP Smart Array P440/4GB FBWC 12Gb 1-port Int FIO SAS Controller NOTE: Provides support for up to 8 internal SAS/SATA drives, consumes 1 PCIe slot. NOTE: Includes the HPE Smart Storage Battery.	761872-B21
HP Smart Array P840/4GB FBWC 12Gb 2-ports Int SAS Controller	726897-B21
HP Smart Array P841/4GB FBWC 12Gb 4-ports Ext SAS Controller NOTE: When ordering controllers, please reference the HPE Cable Options below for the required cable. NOTE: FIO indicates factory integrated option via CTO.	726903-B21
HPE Smart Host Bus Adapters	
HP H240ar 12Gb 2-ports Int Smart Host Bus Adapter NOTE: Provides support for up to 8 internal SAS/SATA drives without using a PCIe slot.	726757-B21
HP H240ar 12Gb 2-ports Int FIO Smart Host Bus Adapter NOTE: Provides support for up to 8 internal SAS/SATA drives without using a PCIe slot.	749976-B21
HP H240 12Gb 2-ports Int Smart Host Bus Adapter	726907-B21
HP H240 12Gb 2-ports Int FIO Smart Host Bus Adapter	761873-B21
HP H241 12Gb 2-ports Ext Smart Host Bus Adapter NOTE: FIO indicates factory integrated option via CTO.	726911-B21
HPE Cable Options	

Additional Options

HP DL360 Gen9 LFF Smart Array P440ar/H240ar SAS Cable 766211-B21

NOTE: Required for an upgrade from a B140i SATA controller to a HPE Smart HBA 240ar or HPE Smart Array P440ar.

HP DL360 Gen9 SFF Embedded SATA Cable 766207-B21

NOTE: Needed only when attaching drive bays to the B140i controller in a 8 SFF Chassis.

HP DL360 Gen9 SFF Smart Array P440/H240 SAS Cables 775927-B21

NOTE: Required for use with the HPE Smart Array P440 (PCIe Controllers) 726821-B21 or 761872-B21, the option kit documentation details out cable placement with the HPE Smart Array P440 in PCIe 3.0 Slots 1 or 2 connecting to the 8SFF backplane or the 2 SFF SAS/SATA option kit.

HP DL360 Gen9 LFF Smart Array P440/H240 SAS Cables 775929-B21

NOTE: Required for use with the HPE Smart Array P440 (PCIe Controllers) 726821-B21 or 761872-B21, the option kit documentation details out cable placement with the HPE Smart Array P440 in PCIe 3.0 Slots 1 or 2 connecting to the 4LFF backplane.

HP DL360 Gen9 SFF Smart Array P440ar/H240ar SAS Cable 766209-B21

HP DL360 Gen9 LFF Embedded SATA Cable 766213-B21

NOTE: Options noted with "DL360 Gen9 SFF..." are options only compatible with the 8 SFF Chassis; and Options noted with "DL360 Gen9 LFF..." are options only compatible with the 4LFF Chassis.

Optional Software

HP SmartCache No Media 24x7 Technical Support 1 Svr License D7S26A

HP SmartCache No Media 24x7 Technical Support Flexible License D7S27A

HP SmartCache No Media 24x7 Technical Support Electronic License D7S27AAE

NOTE: HPE SmartCache is supported when one of the supported Smart Array Controllers is installed in the server.

NOTE: HPE SmartCache comes standard (no licensing is required) if the HPE Smart Array P840 Controller is installed in the server.

Optional Upgrades

HP 96W Smart Storage Battery with 145mm Cable for DL/ML/SL Servers 727258-B21

Additional Options

HPE Tape Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media see: <http://www.hp.com/go/tape>. For hardware and software compatibility of HPE tape backup products see: <http://www.hp.com/storage/SPOCK> and <http://www.hp.com/go/ebs>.

Tape Drives

HPE StoreEver LTO-7 Ultrium 15000 External Tape Drive	BB874A
HPE StoreEver LTO-7 Ultrium 15000 Internal Tape Drive	BB873A
HP StoreEver LTO-6 Ultrium 6650 SAS External Tape Drive	EH964A
HP StoreEver 1/8 G2 LTO-6 Ultrium 6250 FC Tape Autoloader	C0H19A
HP StoreEver LTO-6 Ultrium 6250 Tape Drive in 1U Rack-mount Kit	C0L99A
HP StoreEver LTO-6 Ultrium 6250 External Tape Drive	EH970A
HP StoreEver LTO-5 Ultrium 3000 SAS Tape Drive in 1U Rack-mount	EJ014B
HP StoreEver LTO-5 Ultrium 3000 SAS External Tape Drive	EH958B
HP StoreEver LTO-5 Ultrium 3280 SAS External Tape Drive	EH900B
HP StoreEver LTO-4 Ultrium 1760 SAS (1) in 1U Rack-mount Kit	EH946C
HP StoreEver LTO-4 Ultrium 1760 SAS External Tape Drive	EH920B
HP StoreEver LTO-3 Ultrium 920 SAS External Tape Drive	EH848B
HP StoreEver 1U SAS Rack-mount Kit	AE459B
HP Mini SAS High Density to 4-lane Mini SAS External Fanout 2 Meter Cable	K2R09A
HP Mini SAS High Density to 4-lane Mini SAS External Fanout 4 Meter Cable	K2R10A
HPE Tape Storage Systems	
HPE StoreEver MSL6480	
HP StoreEver MSL6480 Scaleable Expansion Module	QU626A
HP StoreEver MSL6480 Scalable Base Module	QU625A
HP MSL2024 0-Drive Tape Library	AK379A
HP MSL4048 0-Drive Tape Library	AK381A

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/14604_div/14604_div.html (Worldwide).

HPE Disk Backup

HPE RDX Removable Disk Backup System	
HP RDX+ 1TB External Backup System	B7B69B
HP RDX+ 500GB External Backup System	B7B66B
HP RDX 2TB USB3.0 External Disk Backup System	E7X53B
HP RDX+ External Docking System	C8S07B
HP D3700 Enclosure	QW967A
HP D3600 Enclosure	QW968A

NOTE: For the complete range of RDX drives and media see: <http://www.hp.com/go/rdx>. For hardware and software compatibility of HPE disk backup products see: <http://www.hp.com/storage/SPOCK>.

NOTE: Please see the QuickSpecs for additional part numbers, Technical Specifications, and additional information:

http://h18000.www1.hp.com/products/quickspecs/13036_div/13036_div.html (Worldwide).

Additional Options

HPE Storage Options	NOTE: The following is a list of all Fibre Channel Host Bus Adapters for Windows and Linux. For detailed compatibility information please see: http://h18006.www1.hp.com/storage/saninfrastructure/hba.html .	
	Emulex Fibre Channel HBAs	
	HP 81E 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AJ762B
	HP 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ763B
	HP StoreFabric SN1100E 16Gb Single Port Fibre Channel Host Bus Adapter	C8R38A
	HP StoreFabric SN1100E 16Gb Dual Port Fibre Channel Host Bus Adapter	C8R39A
	QLogic Fibre Channel HBAs	
	HP 81Q 8Gb 1-port PCIe Fibre Channel Host Bus Adapter	AK344A
	HP 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ764A
	HP StoreFabric SN1000Q 16GB 1-port PCIe Fibre Channel Host Bus Adapter	QW971A
	HP StoreFabric SN1000Q 16GB 2-port PCIe Fibre Channel Host Bus Adapter	QW972A
	Converged Network Adapter	
	HP StoreFabric CN1100R Dual Port Converged Network Adapter	QW990A
	HP StoreFabric CN1200E 10Gb Converged Network Adapter	E7Y06A

HPE Disk Storage Systems	Disk Enclosures	
	HP D6000 Dual I/O Module Disk Enclosure	QQ695A
	HP D6000 w/35 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 140TB Bundle	E7W30A
	HP D6000 w/70 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 280TB Bundle	E7W31A
	HP D6000 w/35 2TB 6G SAS 7.2K LFF Dual port MDL HDD 70TB Bundle	QQ697A
	HP D6000 w/70 2TB 6G SAS 7.2K LFF Dual port MDL HDD 140TB Bundle	QQ698A
	HP D6000 w/35 3TB 6G SAS 7.2K LFF Dual port MDL HDD 105TB Bundle	QQ699A
	HP D6000 w/70 3TB 6G SAS 7.2K LFF Dual port MDL HDD 210TB Bundle	QQ700A
	HP D6000 w/70 8TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 560TB Bundle	M0T59A
	HP D6000 w/70 6TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 420TB Bundle	M0T57A
	HP D6000 w/35 8TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 280TB Bundle	M0T58A
	HP D2600 w/12 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 48TB Bundle	E7W32A

HPE Data	HPE 11000 G2 Series Racks
----------	---------------------------

Additional Options

Center Racks	HPE 11642 1075mm Pallet Universal Rack	H6J65A
	HPE 11642 1075mm Shock Universal Rack	H6J66A
	HPE 11642 1200mm Pallet Universal Rack	H6J67A
	HPE 11642 1200mm Shock Universal Rack	H6J68A
	HPE 11636 1075mm Pallet Universal Rack	H6J77A
	HPE 11636 1075mm Shock Universal Rack	H6J78A
	HPE 11614 1075mm Shock Universal Rack	H6J82A
	HPE 11622 G2 1075mm Pallet Universal Rack	H6J83A
	HPE 11622 G2 1075mm Shock Universal Rack	H6J84A
	HPE 11648 1075mm Pallet Universal Rack	H6J87A
	HPE 11648 1075mm Shock Universal Rack	H6J88A

NOTE: Please see the [HPE 11000 G2 Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

HPE Intelligent Series Rack		
HPE 636 1075mm Pallet Intelligent Series Rack		BW895A
HPE 636 1075mm Shock Intelligent Series Rack		BW896A
HPE 642 1075mm Pallet Intelligent Series Rack		BW903A
HPE 642 1075mm Shock Intelligent Series Rack		BW904A
HPE 642 1200mm Pallet Intelligent Series Rack		BW907A
HPE 642 1200mm Shock Intelligent Series Rack		BW908A
HPE 647 1075mm Pallet Intelligent Series Rack		BW911A
HPE 647 1075mm Shock Intelligent Series Rack		BW912A
HPE 647 1200mm Pallet Intelligent Series Rack		BW913A
HPE 647 1200mm Shock Intelligent Series Rack		BW914A
HPE 842 1075mm Pallet Intelligent Series Rack		BW917A
HPE 842 1075mm Shock Intelligent Series Rack		BW918A

NOTE: Please see the [HPE Intelligent Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

HPE Value Series Rack		
HPE V142 1075mm deep Pallet 100 series Rack		AF046A

NOTE: Please see the [HPE Value Series Rack QuickSpecs](#) for information on additional racks options and rack specifications.

Rail Kits

NOTE: Gen9 rail kits have changed significantly from prior generation rail kits. Please take a moment to review the installation documentation that comes with the server to help you with the installation of your Gen9 server.

NOTE: Rail kits are optional for DL3680 Gen9 and are no longer included standard with the server. Customers have the option to purchase their server without a rail kit.

NOTE: Ball bearing and Easy Install rail kits contain telescoping rails which allow for in-rack serviceability.

NOTE: To assist in the installation of the server into the rack an optional installation tool is available by contacting your local services representative (p/n 695539-001).

CAUTION: Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper

Additional Options

tools and number of people to use for any installation

HPE Power Distribution Units (PDUs)	HPE Basic Power Distribution Unit (bPDU)	
	HP 1.9kVA 120 Volt L5-20 Input (12xNEMA 5-20R) NA/JP Basic PDU	H5M54A
	HP 3.6kVA 200-240 Volt Detachable C20 Input (12xC13) WW Basic PDU	H5M56A
	HP 2.8kVA 120 Volt L5-30 Input (18xNEMA 5-20R) NA/JP Basic PDU	H5M55A
	HP 3.6kVA 200-240 Volt Detachable C20 Input (18xC13) WW Basic PDU	H5M57A
	HP 4.9kVA 208 Volt L6-30 Input (20xC13) NA/JP Basic PDU	H5M58A
	HP 7.3kVA 230 Volt IEC309 32A Input (20xC13) INTL Basic PDU	H5M68A
	HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13) NA/JP Basic PDU	H5M61A
	HP 4.9kVA 208 Volt L6-30 Input (24xC13/6xC19) NA/JP Basic PDU	H5M59A
	HP 7.3kVA 230 Volt IEC309 32A Input (24xC13/6xC19) INTL Basic PDU	H5M70A
	HP 8.3kVA 208 Volt CS8265C Input (30xC13/6xC19) NA/JP Basic PDU	H5M60A
	HP 11kVA 230 Volt IEC309 63A Input (30xC13/6xC19) INTL Basic PDU	H5M71A
	HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU	H5M75A
	HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU	H5M63A
	HP 8.6kVA 208 Volt L21-30 3-Phase Input (24xC13/3xC19/3xNEMA 5-20R) NA/JP Basic PDU	H5M64A
	HP 8.6kVA 208 Volt L15-30 3-Phase Input (24xC13/6xC19) NA/JP Basic PDU	H5M62A
	HP 11kVA 400 Volt IEC309 16A 3-Phase Input (30xC13/6xC19) INTL Basic PDU	H5M72A
	HP 11kVA 400 Volt IEC309 16A 3-Phase Input (36xC13/6xC19) INTL Basic PDU	H5M73A
	HP 11kVA 400 Volt IEC309 30A 3-Phase Input (36xC13/6xC19) NA Basic PDU	H5M67A
	HP 2.8kVA 24A Low Voltage NA/JP Modular Power Distribution Unit	252663-D71
	HP 4.9kVA 24A High Voltage NA/JP Core Modular Power Distribution Unit	252663-D74
	HP 8.3kVA 40A High Voltage NA/JP Core Modular Power Distribution Unit	252663-D75
	HP 7.3kVA 32A High Voltage INTL Core Modular Power Distribution Unit	252663-B33
	HP 9.2kVA 40A High Voltage INTL Core Modular Power Distribution Unit	252663-B34
	HP 8.6kVA 24A Three Phase NA/JP Modular Power Distribution Unit	AF512A
	HP 11kVA 16A Three Phase INTL Modular Power Distribution Unit	AF513A
	HP 14.4kVA 40A Three Phase NA/JP Modular Power Distribution Unit	AF519A
	HP 17.3kVA 48A Three Phase NA/JP Modular Power Distribution Unit	AF511A
	HP 22kVA 32A Three Phase INTL Core Modular Power Distribution Unit	AF518A

Additional Options

NOTE: To learn more about HPE Basic Power Distribution Units (bPDU), please visit the HPE website at <http://www.hp.com/go/pdu>.

HPE Monitored Power Distribution Units (mPDU)

HP 2.8kVA 120 Volt L5-30 Input (12xNEMA 5-20R)NA/JP Monitored PDU	D9N43A
HP 3.6kVA 200-240 Volt Detachable C20 Input (12xC13) WW Monitored PDU	D9N46A
HP 4.9kVA 208 Volt L6-30 Input (12xC13) NA/JP Monitored PDU	D9N44A
HP 3.6kVA 200-240 Volt Detachable C20 Input (16xC13) WW Monitored PDU	D9N45A
HP 4.9kVA 208 Volt L6-30 Input (12xC13) NA/JP Monitored PDU	G9Z05A
HP 7.3kVA 230 Volt IEC309 32A Input (12xC13) INTL Monitored PDU	G9Z06A
HP 4.9kVA 208 Volt L6-30 Input (20xC13/4xC19) NA/JP Monitored PDU	D9N47A
HP 7.3kVA 230 Volt IEC309 32A Input (20xC13/4xC19) INTL Monitored PDU	D9N48A
HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13/3xC19) NA/JP Monitored PDU	D9N51A
HP 5.7kVA 208 Volt L21-20 3-Phase Input (18xC13/3xNEMA 5-20R) NA/JP Monitored PDU	D9N52A
HP 8.6kVA 208 Volt L21-30 3-Phase Input (20xC13/3xC19/3xNEMA 5-20R) NA/JP Monitored PDU	D9N53A
HP 11kVA 400 Volt IEC309 16A 3-Phase Input (18xC13/3xC19) INTL Monitored PDU	D9N55A
HP 8.3kVA 208 Volt CS8265C Input (30xC13/3xC19) NA Monitored PDU	D9N49A
HP 7.3kVA 230 Volt IEC309 32A Input (32xC13/4xC19) INTL Monitored PDU	D9N50A
HP 11kVA 400 Volt IEC309 16A 3-Phase Input (30xC13/3xC19) INTL Monitored PDU	D9N57A
HP 14.4kVA 208 Volt CS8365C 3-Phase Input (12xC13/12xC19)NA Monitored PDU	D9N58A
HP 16.6kVA 400 Volt IEC309 30A 3-Phase Input (30xC13/3xC19) NA Monitored PDU	D9N61A
HP 16.6kVA 400 Volt IEC309 30A 3-Phase Input (12xC13/12xC19) NA Monitored PDU	D9N62A
HP 17.3kVA 208 Volt IEC309 60A 3-Phase Input (24xC13/3xC19) NA/JP Monitored PDU	D9N54A
HP 17.3kVA 208 Volt IEC309 60A 3-Phase Input (12xC13/12xC19) NA/JP Monitored PDU	D9N59A
HP 17.3kVA 208 Volt IEC309 60A 3-Phase Watertight Input (12xC13/12xC19) NA/JP Monitored PDU	G9Z07A
HP 19.9kVA 480 Volt 3-Phase (30 Outlet) NA Monitored PDU	D9N63A
HP 22kVA 400 Volt IEC309 32A 3-Phase Input (30xC13/3xC19) INTL Monitored PDU	D9N56A
HP 22kVA 400 Volt IEC309 32A 3-Phase Input (12xC13/12xC19) INTL Monitored PDU	D9N60A
HP 22kVA 400 Volt IEC309 32A 3-Phase Watertight Input (12xC13/12xC19) INTL Monitored PDU	G9Z08A



Additional Options

HP Environmental Sensor for Remote Monitored and Managed PDUs E2D53A

NOTE: Please see the [HPE Monitored Power Distribution Units QuickSpecs](#) for information on additional options and product specifications.

HPE Intelligent Power Distribution Units (iPDU)

HP 4.9kVA 24A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit AF520A

HP 8.3kVA 40A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit AF521A

HP 8.6kVA 24A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit AF522A

HP 17.3kVA 48A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit AF523A

HP 11.4kVA 16A 415V Three Phase L22-20 NA Core Intelligent Power Distribution Unit AF900A

HP 17.3kVA 24A 415V Three Phase IEC309 NA Core Intelligent Power Distribution Unit AF901A

HP 7.3kVA 32A Single Phase INTL Core Intelligent Modular Power Distribution Unit AF525A

HP 11kVA 16A Three Phase INTL Core Intelligent Modular Power Distribution Unit AF526A

HP 22kVA 32A Three Phase INTL Core Intelligent Modular Power Distribution Unit AF527A

HP 17.3kVA 48A 208V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit AF535A

HP 17.3kVA 24A 415V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit AF537A

HP 22kVA 32A 400V Three Phase 12 Outlet Core INTL Intelligent Power Distribution Unit AF538A

HP 4.9kVA 24A Single Phase NA/JP Intelligent Modular Power Distribution Kit AF531A

HP 8.6kVA 24A Three Phase NA/JP Intelligent Modular Power Distribution Kit AF532A

HP 14.4kVA 40A Three Phase NA/JP Intelligent Modular Power Distribution Unit AF533A

HP 7.3kVA 32A Single Phase INTL Intelligent Modular Power Distribution Kit AF534A

HP 5xC13 Intelligent PDU Extension Bar G2 Kit AF547A

HP 5xC13 Outlets Power and UID LEDs Pair Standard Extension Bar AF528A

NOTE: Please see the [HPE Intelligent Power Distribution Units QuickSpecs](#) for information on additional options and product specifications.

HPE Managed Power Distribution Units (maPDU)

Additional Options

HP 2.8kVA 120 Volt L5-30 Input (24x NEMA 5-20) NA/JP Managed PDU	H8B48A
HP 3.6kVA 200-240 Volt Detachable C20 Input (7xC13/1xC19) WW Managed PDU	H8B49A
HP 4.9kVA 208 Volt L6-30 Input (20xC13/4xC19) NA/JP Managed PDU	H8B50A
HP 7.3kVA 200-240 Volt IEC309 32A Input (20xC13/4xC19) INTL Managed PDU	H8B51A
HP 8.6kVA 208 Volt L15-30 3 Phase Input (18xC13/6xC19) NA/JP Managed PDU	H8B52A
HP 8.6kVA 208 Volt L21-30 3 Phase Input (20xC13/3xC19/1x NEMA 5-20) NA/JP Managed PDU	H8B53A
HP 11kVA 400 Volt IEC309 16A 3 Phase Input (21xC13/3xC19) INTL Managed PDU	H8B54A
HP 14.4kVA 208V CS8365C 3 Phase Input (12xC13/12xC19) NA/JP Managed PDU	H8B55A
HP 17.3kVA 208V IEC309 60A 3 Phase Input (12xC13/12xC19) NA/JP Managed PDU	H8B56A

NOTE: Please see the [HPE Managed Power Distribution Units QuickSpecs](#) for information on additional options and product specifications.

NOTE: To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).

HPE Rack Mount Consoles, KVM Switches, and Keyboards	HPE Location Discovery Services	
	HP 36U Location Discovery Kit	BW945A
	HP 42U Location Discovery Kit	BW946A
	HP 47U Location Discovery Kit	BW947A
	HP Location Discovery Services LCD8500 Kit	TL052A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/14429_div/14429_div.html (Worldwide)	
	HPE Rack Mount Consoles	
	HP LCD8500 1U US Rackmount Console Kit	AF630A
	HP LCD8500 1U UK Rackmount Console Kit	AF631A
	HP LCD8500 1U DE Rackmount Console Kit	AF632A
	HP LCD8500 1U FR Rackmount Console Kit	AF633A
	HP LCD8500 1U JP Rackmount Console Kit	AF642A
	HP LCD8500 1U RU Rackmount Console Kit	AF643A
	HP LCD8500 1U INTL Rackmount Console Kit	AF644A
	HP LCD8500 1U US TAA Rackmount Console Kit	AF645A
	HPE KVM Switches	

Additional Options

HP 0x1x8 G3 KVM Console Switch	AF651A
HP 0x2x16 G3 KVM Console Switch	AF652A
HP TAA 0x2x16 G3 KVM Console Switch	AF653A
HP USB Remote Access Key for G3 KVM Console Switches	AF650A
HP KVM Console USB Interface Adapter	AF628A
HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software	AF618A
HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software	AF619A
HP KVM Console USB 2.0 Virtual Media CAC Interface Adapter	AF629A
HP 1x4 USB/PS2 KVM Console Switch	AF611A
HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software	AF620A
HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software	AF621A
HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software	AF622A
NOTE: To learn more, please visit the HPE KVM Switches web page .	
HPE USB Keyboard and Mouse	
HP USB BFR with PVC Free US Keyboard/Mouse Kit	631341-B21
HP USB BFR with PVC Free UK Keyboard/Mouse Kit	631344-B21
HP USB BFR with PVC Free FR Keyboard/Mouse Kit	631346-B21
HP USB BFR with PVC Free ES Keyboard/Mouse Kit	631348-B21
HP USB BFR with PVC Free DE Keyboard/Mouse Kit	631358-B21
HP USB BFR with PVC Free JP Keyboard/Mouse Kit	631360-B21
HP USB BFR with PVC Free IT Keyboard/Mouse Kit	631362-B21
HP USB BFR with PVC Free CN Keyboard/Mouse Kit	631364-B21
HP USB BFR with PVC Free AE Keyboard/Mouse Kit	638212-B21
HP USB BFR with PVC Free RU Keyboard/Mouse Kit	638214-B21
HP USB BFR with PVC Free IN Keyboard/Mouse Kit	672097-D63
HP USB BFR with PVC Free AP-Intl Keyboard/Mouse Kit	672097-373
HP USB BFR with PVC Free Intl Keyboard/Mouse Kit	672097-B33
HP USB BFR with PVC Free PT Keyboard/Mouse Kit	672097-133
HP USB BFR with PVC Free TR Keyboard/Mouse Kit	672097-143
HP USB BFR with PVC Free CZ Keyboard/Mouse Kit	672097-223
HP USB BFR with PVC Free FI Keyboard/Mouse Kit	672097-353
HP USB BFR with PVC Free SE Keyboard/Mouse Kit	672097-103
HP USB BFR with PVC Free CH Keyboard/Mouse Kit	672097-113
HP USB BFR with PVC Free KR Keyboard/Mouse Kit	672097-KD3
Rail Kits	
HP 1U LFF Gen9 Easy Install Rail Kit	789388-B21
HP 1U Small Form Factor Easy Install Rail Kit	734807-B21
HP 1U Cable Management Arm for Easy Install Rail Kit	734811-B21
HP 1U Small Form Factor Ball Bearing Rail Kit	663201-B21
HP 1U Large Form Factor Ball Bearing Rail Kit	663202-B21
HP 1U Cable Management Arm for Ball Bearing Rail Kit	663203-B21

Additional Options

HPE Other Options	
HP Rack LED Light Kit	BW939A
HP Kit LCD 1.83m Latch Display Port Cable	G7T29A
HP Advanced Power Manager Kit	741192-B21

HPE Uninterruptible Power Systems (UPS)	HPE DirectFlow Three Phase UPS Power Unit (1U UPS)	
	HP R12000 DirectFlow - 1U Rackmount Uninterruptible Power System	G9Y75A
	HP R12000 DirectFlow - POD 1U Rackmount Uninterruptible Power System	AF478A
	Input/Output Module Options for 1U UPS	
	HP 32A 400-415 Volt Three Phase INTL R12000 DirectFlow UPS IEC309 Input/Output Module	AF488A
	HP 30A 400-415 Volt Three Phase NA R10000 DirectFlow UPS IEC309 Input/Output Module	AF489A
	HP 32A 380 Volt Three Phase China R12000 DirectFlow UPS Underminated Input/Output Module	AF490A
	HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS L22-30 Input/Output Module	AF491A
	HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module	AF492A
	HP 30A 400-415 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module	G9Y76A
	HP DirectFlow UPS Management Card	AF493A
	Power Unit (2U UPS)	
	HP R18000 DirectFlow - 2U Rackmount Uninterruptible Power System	AF479A
	Input/Output Module Options for 2U UPS	
	HP 32A 400-415 Volt Three Phase INTL R18000 DirectFlow UPS IEC309 Input/Output Module	AF483A
	HP 30A 380 Volt Three Phase China R18000 DirectFlow UPS Underminated Input/Output Module	AF485A
	HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	AF486A
	HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	AF487A
	HP 30A 400 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	D9Q02A
	HP 30A 400-415V Three Phase NA R18000 DirectFlow UPS 1:1 IEC309 Input/Output Module	AF484A
	NOTE: All Input/Output Modules support dual output outlets except the AF484A.	
	Battery Pack Options	
	HP DirectFlow UPS - 1U Rackmount Lithium-ion Battery Pack	AF480A
	HP DirectFlow UPS - 3U Rackmount VRLA Battery Pack	AF482A
	HP WW DirectFlow Secondary Battery Cable	AF497A
	NOTE: Please see the HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs for information on additional options and product specifications.	

Additional Options

HPE Tower UPS	
HPE T750 G4 UPS Models	
HP T750 G4 NA/JP Uninterruptible Power System	J2P85A
HP T750 G4 INTL Uninterruptible Power System	J2P88A
HPE T1000 G4 UPS Models	
HP T1000 G4 NA/JP Uninterruptible Power System	J2P86A
HP T1000 G4 INTL Uninterruptible Power System	J2P89A
HPE T1500 G4 UPS Models	
HP T1500 G4 NA/JP Uninterruptible Power System	J2P87A
HP T1500 G4 INTL Uninterruptible Power System	J2P90A
HPE T750 G2 UPS Models	
HP T750 G2 750VA INTL Tower Uninterruptible Power System	AF447A
HPE Rack/Tower UPS	
HPE R/T2200 G4 UPS Models	
HP R/T2200 G4 NA/JP Uninterruptible Power System	J2R00A
HPE R/T3000 G4 UPS Models	
HP R/T3000 G4 Low Voltage NA/JP Uninterruptible Power System	J2R01A
HP R/T3000 G4 High Voltage NA/JP Uninterruptible Power System	J2R02A
HP R/T3000 G4 High Voltage INTL Uninterruptible Power System	J2R04A
R1500 G4 Models	
HP R1500 G4 NA Uninterruptible Power System	J2Q99A
HP R1500 G4 JP/TWN Uninterruptible Power System	J2R05A
HP R1500 G4 INTL Uninterruptible Power System	J2R03A
R7000 Uninterruptible Power System (UPS)	
HP R7000 4U 50A High Voltage NA/JP Uninterruptible Power System	AF462A
HP R7000 4U IEC-32A High Voltage INTL Uninterruptible Power System	AF463A
R5000 Uninterruptible Power System (UPS)	
HP R5000 3U L630 High Voltage NA/JP Uninterruptible Power System	AF460A
HP R5000 3U IEC309-32A High Voltage INTL Uninterruptible Power System	AF461A
NOTE: Please see the HPE Line Interactive Single Phase UPS QuickSpecs for information on additional options and product specifications.	
Expansion modules for RP36000/3 UPS	
HP RP12000/3 12000VA Three Phase INTL 6U Rackmount Uninterruptible Power System	AF437A
HPE UPS Options	
HP R/T2200 G4 Extended Runtime Module	J2R09A
HP R/T3000 G4 Extended Runtime Module	J2R10A
HP 2U Rack/Tower UPS Shipping Kit	L4Q11A
NOTE: To learn more, please visit the HPE Uninterruptible Power Systems (UPS) web page .	

Additional Options

HPE USB and SD Options	HPE Enterprise Mainstream Flash Media Kits for Memory Cards	
	HP 32GB microSD Enterprise Mainstream Flash Media Kit	700139-B21
	HP 8GB microSD Enterprise Mainstream Flash Media Kit	726116-B21
	HP 8GB USB Enterprise Mainstream Flash Media Drive Key Kit	737953-B21
	HP Dual 8GB microSD Enterprise Midline USB Kit	741279-B21

HPE Care Pack Services	Installation & Start-up Services	
	HP Install ProLiant DL36x(p) Service	U4506E
	HP Startup ProLiant DL36x(p) Service	U4507E
	Proactive Care	
	HP 3 year 24x7 DL360 Gen9 w/IC Proactive Care Service	U5HM4E
	HP 3 year 24x7 with Defective Media Retention DL360 Gen9 w/IC Proactive Care Service	U5HM5E
	HP 3 year 24x7 w/Comprehensive Defective Material Retention DL360 Gen9 w/IC Proactive Care Service	U5HM6E
	HP 3 year Call to Repair DL360 Gen9 w/IC Proactive Care Service	U5HN3E
	HP 3 year Call to Repair with Defective Media Retention DL360 Gen9 w/IC Proactive Care Service	U5HN4E
	HP 3 year CTR with Comprehensive Defective Material Retention DL360 Gen9 w/IC Proactive Care Service	U5HN5E
	HP 3 year 24x7 DL360 Gen9 Proactive Care Service	U7AM2E
	HP 3 year 24x7 with Defective Media Retention DL360 Gen9 Proactive Care Service	U7AM3E
	HP 3 year 24x7 with Comprehensive Defective Material Retention DL360 Gen9 Proactive Care Service	U7AM4E
	HP 3 year Call to Repair DL360 Gen9 Proactive Care Service	U7AM8E
	HP 3 year Call to Repair with Defective Media Retention DL360 Gen9 Proactive Care Service	U7AM9E
	HP 3 year CTR with Comprehensive Defective Material Retention DL360 Gen9 Proactive Care Service	U7AN0E

Memory

Memory Population guidelines



DIMM population order									
1st slot of channel				2nd slot of channel				3rd slot of channel	
A	B	C	D	E	F	G	H	I	J
Number of DIMMs to install									
4									
8									
12									

General Memory Population Rules and Guidelines:

- White DIMM slots denote the first slot of a channel. For 1 DPC (DIMM per channel) populate white slots only.
- A minimum of one DIMM is required per processor
- Install DIMMs only if the corresponding processor is installed.
- When two processors are installed, balance the DIMMs across the two processors.
- Populate DIMMs from heaviest load (quad-rank) to lightest load (single-rank) within a channel. Heaviest load (DIMM with most ranks) within a channel goes furthest from the processor.
- Do not mix RDIMMs or LRDIMMs.
- DIMMs of different speeds may be mixed in any order; the server will select a common optimal speed.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the memory type and number of installed processors.

Memory

- HPE memory from previous generation servers is not compatible with the DL360 Gen9 Server.
- For memory population rules and additional memory guidelines, please see the DL360 Gen9 user guide at <http://www.hp.com/support>.
- There are four (4) Memory channels per processor; eight (8) channels per 2 processor server.
- There are three (3) DIMM slots for each memory channel; twenty four (24) total slots for 2 processor server.

Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E5-2600v3 Series Processor Family

Memory Bandwidth and Capacity							
[DIMM Type]	Registered DIMMs (RDIMMs)					Load Reduced (LRD)	
DIMM Rank	Single Rank	Single Rank	Dual Rank	Dual Rank	Dual Rank	Dual Rank	Quad Rank
DIMM Capacity	4GB	8GB	8GB	16GB	32GB	16GB	32GB
DIMM Native Speed (MT/s)	2133	2133	2133	2133	2133	2133	2133
Voltage	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V
SLOTS THAT CAN BE POPULATED							
24 slot servers	24	24	24	24	24	24	24
MAXIMUM CAPACITY (GB)							
	96	192	192	384	768	384	768
POPULATED DIMM SPEED (MT/s)							
1 DIMM Per Channel	2133	2133	2133	2133	2133	2133	2133
2 DIMM Per Channel	2133	2133	2133	2133	2133	2133	2133
3 DIMM Per Channel	1600	1600	1600	1600	1600	1866	1866

Memory

DIMM slot and configuration diagram

DIMM slot and configuration diagrams

Population order; start with "A" first, "B" second, "C" third, etc.

When one processor is installed, install DIMMs in sequential alphabetic order: A, B, C, D, E, F

When two processors are installed, install DIMMs in sequential alphabetic order: CPU1-A, CPU2-A, CPU1-B, CPU2-B, CPU1-C, CPU2-C

CPU 1			CPU 2		
Slot #	population order		Slot #	population order	
1			1		

Memory Speed by Processor Model

Processor Models	Supported Memory Speeds
E5-2603v3, E5-2609v3	1600MHz
E5-2623v3, E5-2620v3, E5-2630v3, E5-2640v3, E5-2630Lv3	1866MHz
E5-2637v3, E5-2650v3, E5-2660v3, E5-2670v3, E5-2680v3, E5-2690v3, E5-2683v3, E5-2695v3, E5-2697v3, E5-2643v3, E5-2667v3, E5-2687Wv3, E5-2698v3, E5-2650Lv3, E5-2699v3	2133MHz

Standard and Maximum Memory Capacity (Pre-configured Models)


Pre-Configured Models	Standard Memory	Maximum Memory Plus Optional Memory	Standard Memory Replaced with Optional Memory
E5-2603v3	8GB (1x8GB)	1480GB (23x64GB, 1x8GB)	1536GB (24x64GB)
E5-2630v3	16GB (1x16GB)	1488GB (23x64GB, 1x16GB)	1536GB (24x64GB)
E5-2650v3	32GB (2x16GB)	1440GB (22x64GB, 2x16GB)	1536GB (24x64GB)
E5-2670v3	64GB (4x16GB)	1344GB (20x64GB, 4x16GB)	1536GB (24x64GB)

Memory


DDR4 memory options part number decoder

NOTE: Capacity references are rounded to the common gigabyte (GB) values.

- 8GB = 8,192MB
- 16GB = 16,384MB
- 32GB = 32,768MB
- 64GB = 65,536MB

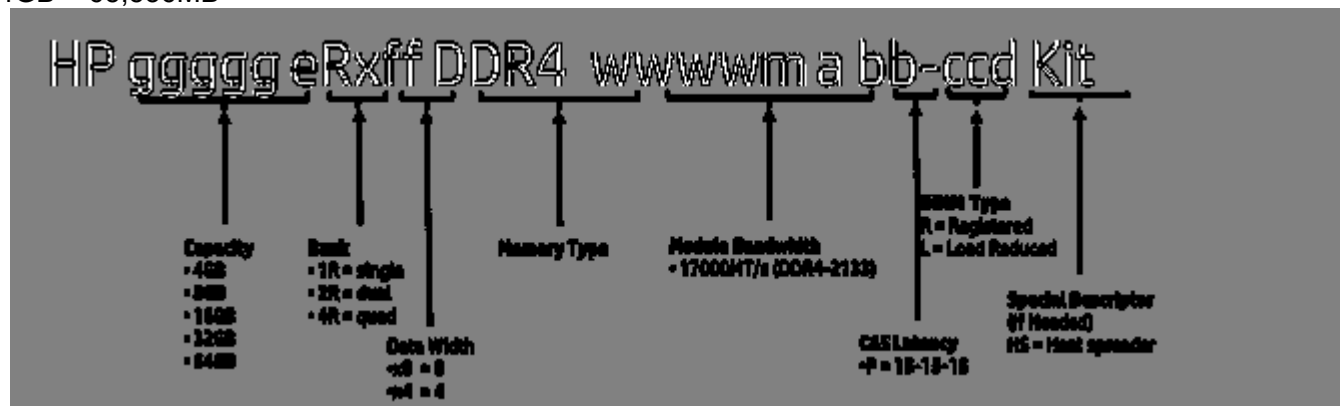

Storage




1-8

8 x SFF SATA/SAS/SSD Hot Pluggable
Hard Drive Bays



1-4

4 x LFF SATA/SAS/SSD Hot Pluggable
Hard Drives Bays



1-10

10 x SFF SATA/SAS/SSD Hot Pluggable
Hard Drive Bays

Technical Specifications

System Unit	Dimensions	8 SFF and 10 SFF 1.7 x 17.1 x 27.5 inches (4.32 x 43.47 x 69.85 cm) (H x W x D) 4 LFF - 1.7 x 17.1 x 29.5 inches (4.32 x 43.46 x 75.0 cm)
	Weight	Maximum: 8 SFF Chassis 33.3 lb. (15.31 kg) NOTE: Includes 2 (approximate) (all hard drives, SFF Option for a total of 10 SFF HDD power supply, and processor installed)
		4 LFF Chassis 37 lb. (16.78kg)
	Minimum:	8SFF Chassis 27 lb. (12.25 kg)
		(one hard drive, power supply, and processor installed)
		4 LFF Chassis 30.36 lb. (13.77 kg)
	Input	Range Line 100 to 120 VAC
	Requirements	Voltage 200 to 240 VAC
	BTU Rating	Maximum For 800W Power Supply: 3207 BTU/hr (at 100 VAC), 3071 BTU/hr (at 200 VAC), 3112 BTU/hr (at 240 VAC) for China Only For 500W Power Supply: 1979 BTU/hr (at 100 VAC), 1911 BTU/hr (at 200 VAC), 1965 BTU/hr (at 240 VAC) for China Only
	Power Supply	Rated For 1400W Power Supply: 1400W (at 240 VAC),
Output	Steady-State	1400W (at 240 VAC)
	Power	For 800W Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VAC) input for China only For 500W Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VAC) input for China only
	Maximum	For 1400W Power Supply: 1400W (at 200 to 240
	Peak Power	1VAC), 1400W (at 240 VAC) input for China only For 800W Power Supply: 800W (at 100 to 127 VAC), 800W (at 200 to 240 1VAC), 800W (at 240 VAC) input for China only For 500W Power Supply: 500W (at 100 to 127 VAC), 500W (at 200 to 240 VAC), 500W (at 240 VAC) input for China only
	System Inlet	Standard 10° to 35°C (50° to 95°F) at sea level with an altitude
	Temperature	Operating derating of 1.0°C per every 305 m (1.8°F per every 1000 ft)
	Support	above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed.
		NOTE: System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).
	Extended	For approved hardware configurations, the supported
	Ambient	

Technical Specifications

	Operating Support	50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hp.com/servers/ashrae
		For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hp.com/servers/ashrae
Relative Humidity	Non-operating	System performance may be reduced if operating in the extended ambient operating range or with a fan fault. -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).
	Operating	Minimum to be the higher (more moisture) of -12°C (10.4°F) dew point or 8% relative humidity. Maximum to be the lower (less moisture) of 24°C (75.2°F) dew point or 90% relative humidity.
(non-condensing) Altitude	Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
	Operating	3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
Acoustic Noise	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
		Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).
	Idle	
	L WAd	(1P non-redundant) 4.6 A Average Bystander (2P redundant) 5.5 A Average Bystander
	L pAm	(1P non-redundant) 29 dBA (2P redundant) 37 dBA
	Operating	
	L WAd	(1P non-redundant) 4.6 A Average Bystander (2P redundant) 6.2 C Average Bystander
	L pAm	(1P non-redundant) 30 dBA (2P redundant) 46 dBA
	NOTE: 1P Configuration tested included two Intel E5-2630 v3, 2.3GHz processors, one 500GB SAS HDD, five standard hot plug fans, one 8GB DDR4 RDIMM's 2133MHz, one 500W power supply.	

Technical Specifications

NOTE: 2P Configuration tested included two Intel E5-2650 v3, 2.6GHz processors, one 500GB SAS HDD, seven standard hot plug fans, two 16GB DDR4 RDIMM's 2133MHz, one 500W power supply, P440ar HDD controller PCI card with 2GB cache.

NOTE: Values are subject to change without notification and are for reference only.

NOTE: Performance of system, options, and ancillary equipment will vary depending on the system configuration.

NOTE: Levels presented do not account for non-Hewlett-Packard installed hardware.

Emissions	FCC Rating	Class A
Classification	Normative	CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15;
(EMC)	Standards	ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

HPE Dynamic Smart Array B140i Controller	Number of PCI links	Four
	PCI link rate	4 Gb/s
	Storage protocol support	SATA
	SAS/SATA peak data transfer rate	6 Gb/s
	Number of SAS/SATA links	10 links
	SAS/SATA connectivity	2x4 connectors; 2x1 connectors
	Expander support	No
	Drives supported (max)	Up to 10 Internal Drives
	RAID support	0, 1, 10, 5 SATA
	Software management	HPE SSA, SMH, SIM
	Warranty	Server warranty
	HPE Secure Encryption license	Not Supported
	HPE SmartCache License	Not Supported
	HPE Smart Storage Administrator	Supported

HPE Ethernet 1Gb 4-port 331i	Network Interface	10Base-T/100Base-TX/1000Base-TX
------------------------------	-------------------	---------------------------------



Technical Specifications

Adapter	Compatibility	IEEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX
	Ports	
	Data Transfer Method	PCI Express, two lanes (x2)
	Controller	BCM5719
	Network	10Base-T (Half-Duplex)
	Transfer Rate	10 Mb/s per port, 40 Mb/s combined
		10Base-T (Full-Duplex)
		20 Mb/s per port, 80 Mb/s combined
		100Base-TX (Half-Duplex)
		100 Mb/s per port, 400 Mb/s combined
		100Base-TX (Full-Duplex)
		200 Mb/s per port, 800 Mb/s combined
		1000Base-TX (Half and Full-Duplex)
		1000Mb/s per port, 4000 Mb/s combined
		1000Base-TX (Full-Duplex)
		2000Mb/s per port, 8000 Mb/s combined
	Connector	Four RJ-45
	Cable Support	10 Base-T Categories 3, 4 or 5 UTP; up to 328 ft (100 m) 10/100/1000 Base-TX Category 5 or higher UTP; up to 328 ft (100 m)

Environment-friendly Products and Approach	End-of-life Management and Recycling	Hewlett-Packard offers end-of-life Hewlett Packard Enterprise product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green . To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.
--	--------------------------------------	--

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HEWLETT PACKARD ENTERPRISE OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

Date	Version History	Action	Description of Change
17-Dec-2015	From Version 11 to 12	Added	Smart Buy models were added to the NA version.
01-Dec-2015	From Version 10 to 11	Added	New HDD offering was added to HPE Drives. New options added to HPE PCIe Workload Accelerator Options, HPE Tape Backup, and HPE Disk Storage Systems.
		Changed	On System Management Chipset, Embedded Management, and Server utilities were revised. Product images were updated.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
28-Sep-2015	From Version 9 to 10	Added	Added support for PCIe Solid State Drives, additional 6Gb SATA SSD drives, support for new Network adapters, and support for new PCIe workload accelerators. Added new HP OneView management software.
		Changed	Internal Storage Devices, Maximum Internal Storage, and HP Drives were updated.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
17-Aug-2015	From Version 8 to 9	Added	Added new Solid State Drives offering.
		Changed	What's New changed to: Support for PCIe Solid State Drives Support for additional 6Gb SATA SSD drives Maximum Internal Storage and HPE Unique Options were revised.
6-Jan-2015	From Version 7 to 8	Added	New DVD Universal Media Bay option was added. New larger capacity HDDs (up to 8TB LFF), Max capacity 32TB were added. New higher capacity memory (64GB), Max capacity 1.5TB was added. New Networking options were added. Optional Software was added to HPE Storage Controllers.

Summary of Changes

		Changed	HPE Disk Backup and HPE Uninterruptible Power Systems (UPS) were updated.
30-Mar-2015	From Version 6 to 7	Added	New Hard Drives offering. Added new HPE PCIe Workload Accelerator Options. Optional Software added to HPE Storage Controllers. Added new HPE Care Pack Services.
		Changed	What's New, Core Options, and Additional Options were revised.
		Removed	Removed obsolete HPE Care Pack Services.
17-Feb-2015	From Version 5 to 6	Added	Added Smart Buy Models to the NA version only.
2-Sep-2015	From Version 4 to 5	Added	Added What's New section. Added new HPE Drives, Pre-configured Models, and G4 UPS models.
		Changed	HPE Processors, HPE Disk Backup, HPE Tape Backup, HPE Rack Mount Consoles, KVM Switches, and Keyboards, HPE Uninterruptible Power Systems (UPS), and HPE Computation and Graphics Accelerators sections were revised.
12-Jan-2014	From Version 3 to 4	Changed	Changes were made throughout the QuickSpecs.
13-Oct-2014	From Version 2 to 3	Added	6G SATA Enterprise Value G1 Solid State Drives were added to Core Option section. HPE PCIe Workload Accelerator Options, HPE USB and SD options were added to the Additional Options section. Smart Buys section was added to NA version.
		Changed	Call outs description for images, Standard Features, Optional Features, Pre-Configured Models, Configuration Information - Factory Integrated Models, Core Options, Additional Options, and Memory sections were revised.
23-Sep-2014	From version 1 to version 2	Changed	Changes were made throughout the QuickSpecs.

Summary of Changes



hp.com/qsref/dl360gen9

Sign up for updates			
	Rate this document		

© Copyright 2015 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.



For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

c04346229 - 15033 - Worldwide - V12 - 17-December-2015